


IMPROVEMENTS TO HARRISON AVENUE

NEW JERSEY DEPARTMENT OF TRANSPORTATION TRUST FUND

BOROUGH OF FAIR HAVEN
 MONMOUTH COUNTY, NEW JERSEY
 FEBRUARY 2021

PUBLIC UTILITIES	
ELECTRIC	
JERSEY CENTRAL POWER & LIGHT ONE RIVER CENTRE 331 NEWMAN SPRINGS ROAD, BLDG. 3 REDBANK, NEW JERSEY 07701	(732) 212-4246
GAS	
NEW JERSEY NATURAL GAS COMPANY 1415 WYCKOFF ROAD WALL, NEW JERSEY 07719	(732) 938-1000
WATER	
NJ AMERICAN WATER COMPANY 661 SHREWSBURY AVENUE SHREWSBURY, NEW JERSEY 07702	(732) 933-5924
BOROUGH OF REDBANK 75 CHESTNUT STREET REDBANK, NEW JERSEY 07701	(732) 530-2770
TELEPHONE	
VERIZON 5100 BELMAR BLVD. FARMINGDALE, NEW JERSEY 07727	(732) 751-8718
CABLE	
COMCAST CABLE COMPANY 403 SOUTH STREET EATONTOWN, NJ 07724	(732) 542-8107
SEWER	
TWO RIVERS WATER RECLAMATION AUTHORITY 1 HIGHLAND AVENUE MONMOUTH BEACH, NEW JERSEY 07750	(732) 229-8578

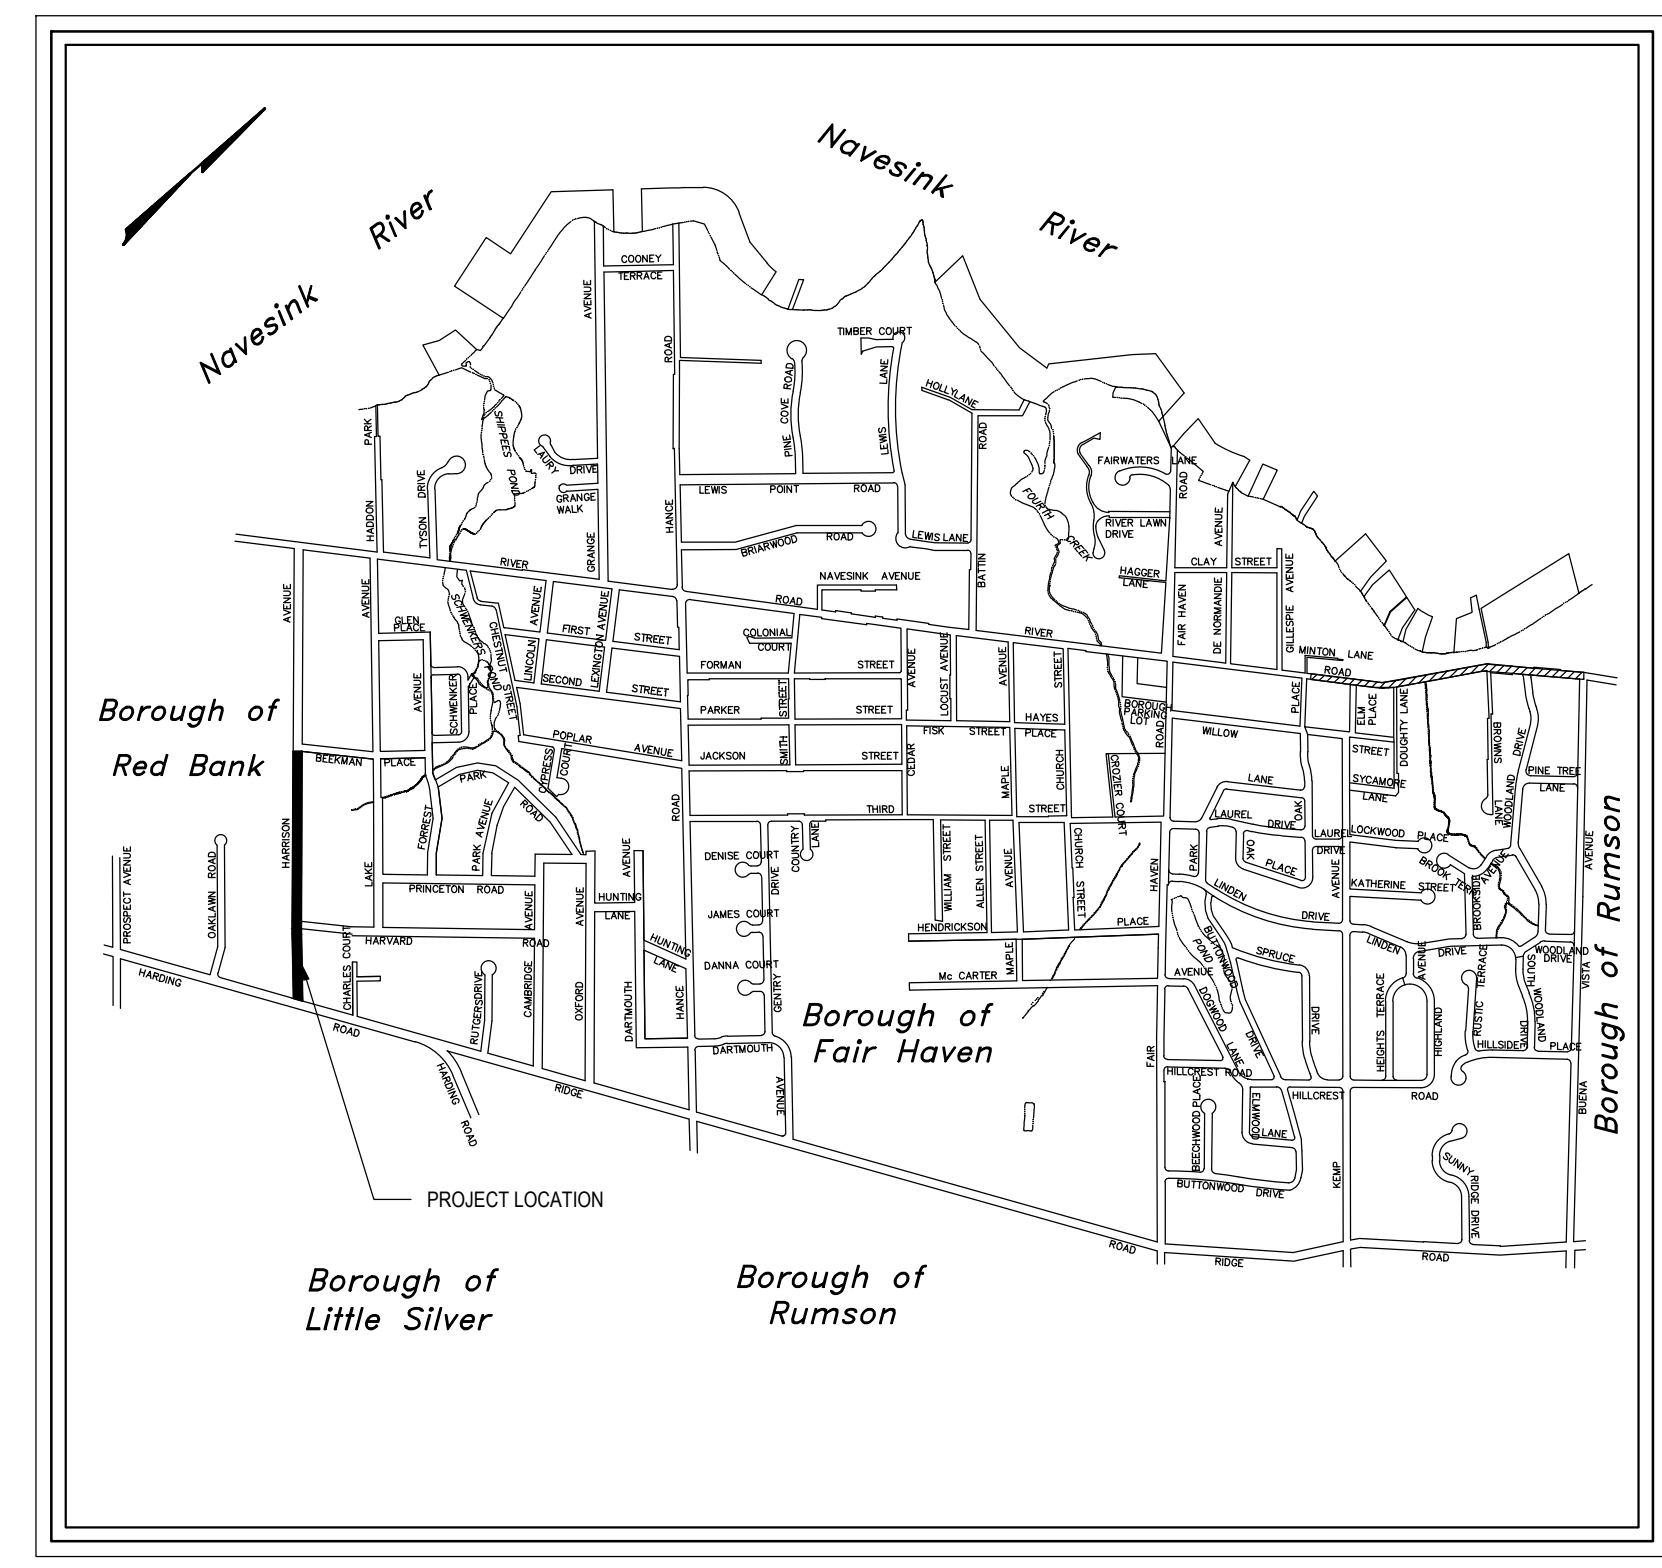

LOCATION OF UTILITIES SHOWN ON THE PLANS ARE PLOTTED FROM AVAILABLE DATA ON FILE WITH THE UTILITY COMPANIES AND ARE NOT WARRANTED AS TO EXACTNESS. CONTRACTOR IS TO DETERMINE EXACT LOCATION AND DEPTH OF UTILITIES AT ALL CROSSINGS PRIOR TO CONSTRUCTION IN ACCORDANCE WITH THE REQUIREMENTS OF THE CONTRACT DOCUMENTS.




KEY MAP
 SCALE : 1"=2000'

SHEET INDEX	
1	TITLE SHEET AND LOCATION PLAN
2	LEGEND, NOTES, AND CONTRACT QUANTITIES
3 - 4	CONSTRUCTION PLANS
5 - 6	CONSTRUCTION DETAILS
7	TRAFFIC CONTROL PLAN AND NOTES

NJDOT STANDARD ROADWAY CONSTRUCTION - TRAFFIC CONTROL - BRIDGE CONSTRUCTION
 DETAILS BOOKLET AND STANDARD SPECIFICATIONS (2019) SHALL GOVERN FOR THIS PROJECT.

TITLE SHEET AND LOCATION PLAN			
IMPROVEMENTS TO HARRISON AVENUE			
 BOROUGH OF FAIR HAVEN 748 River Road, Fair Haven, NJ 07704 phone: 732.747.0241 fax: 732.747.6962 website: www.fairhavennj.org	Scale: AS NOTED	Project No. 21-01	
	Drawn by: RG	Designed by: RG	
 RICHARD GARDELLA, PE, PP, CME, CPWM PROFESSIONAL ENGINEER New Jersey License No. 43747	DATE: 02/26/2021		
Sheet Number: 1		of 7	

STANDARD LEGEND

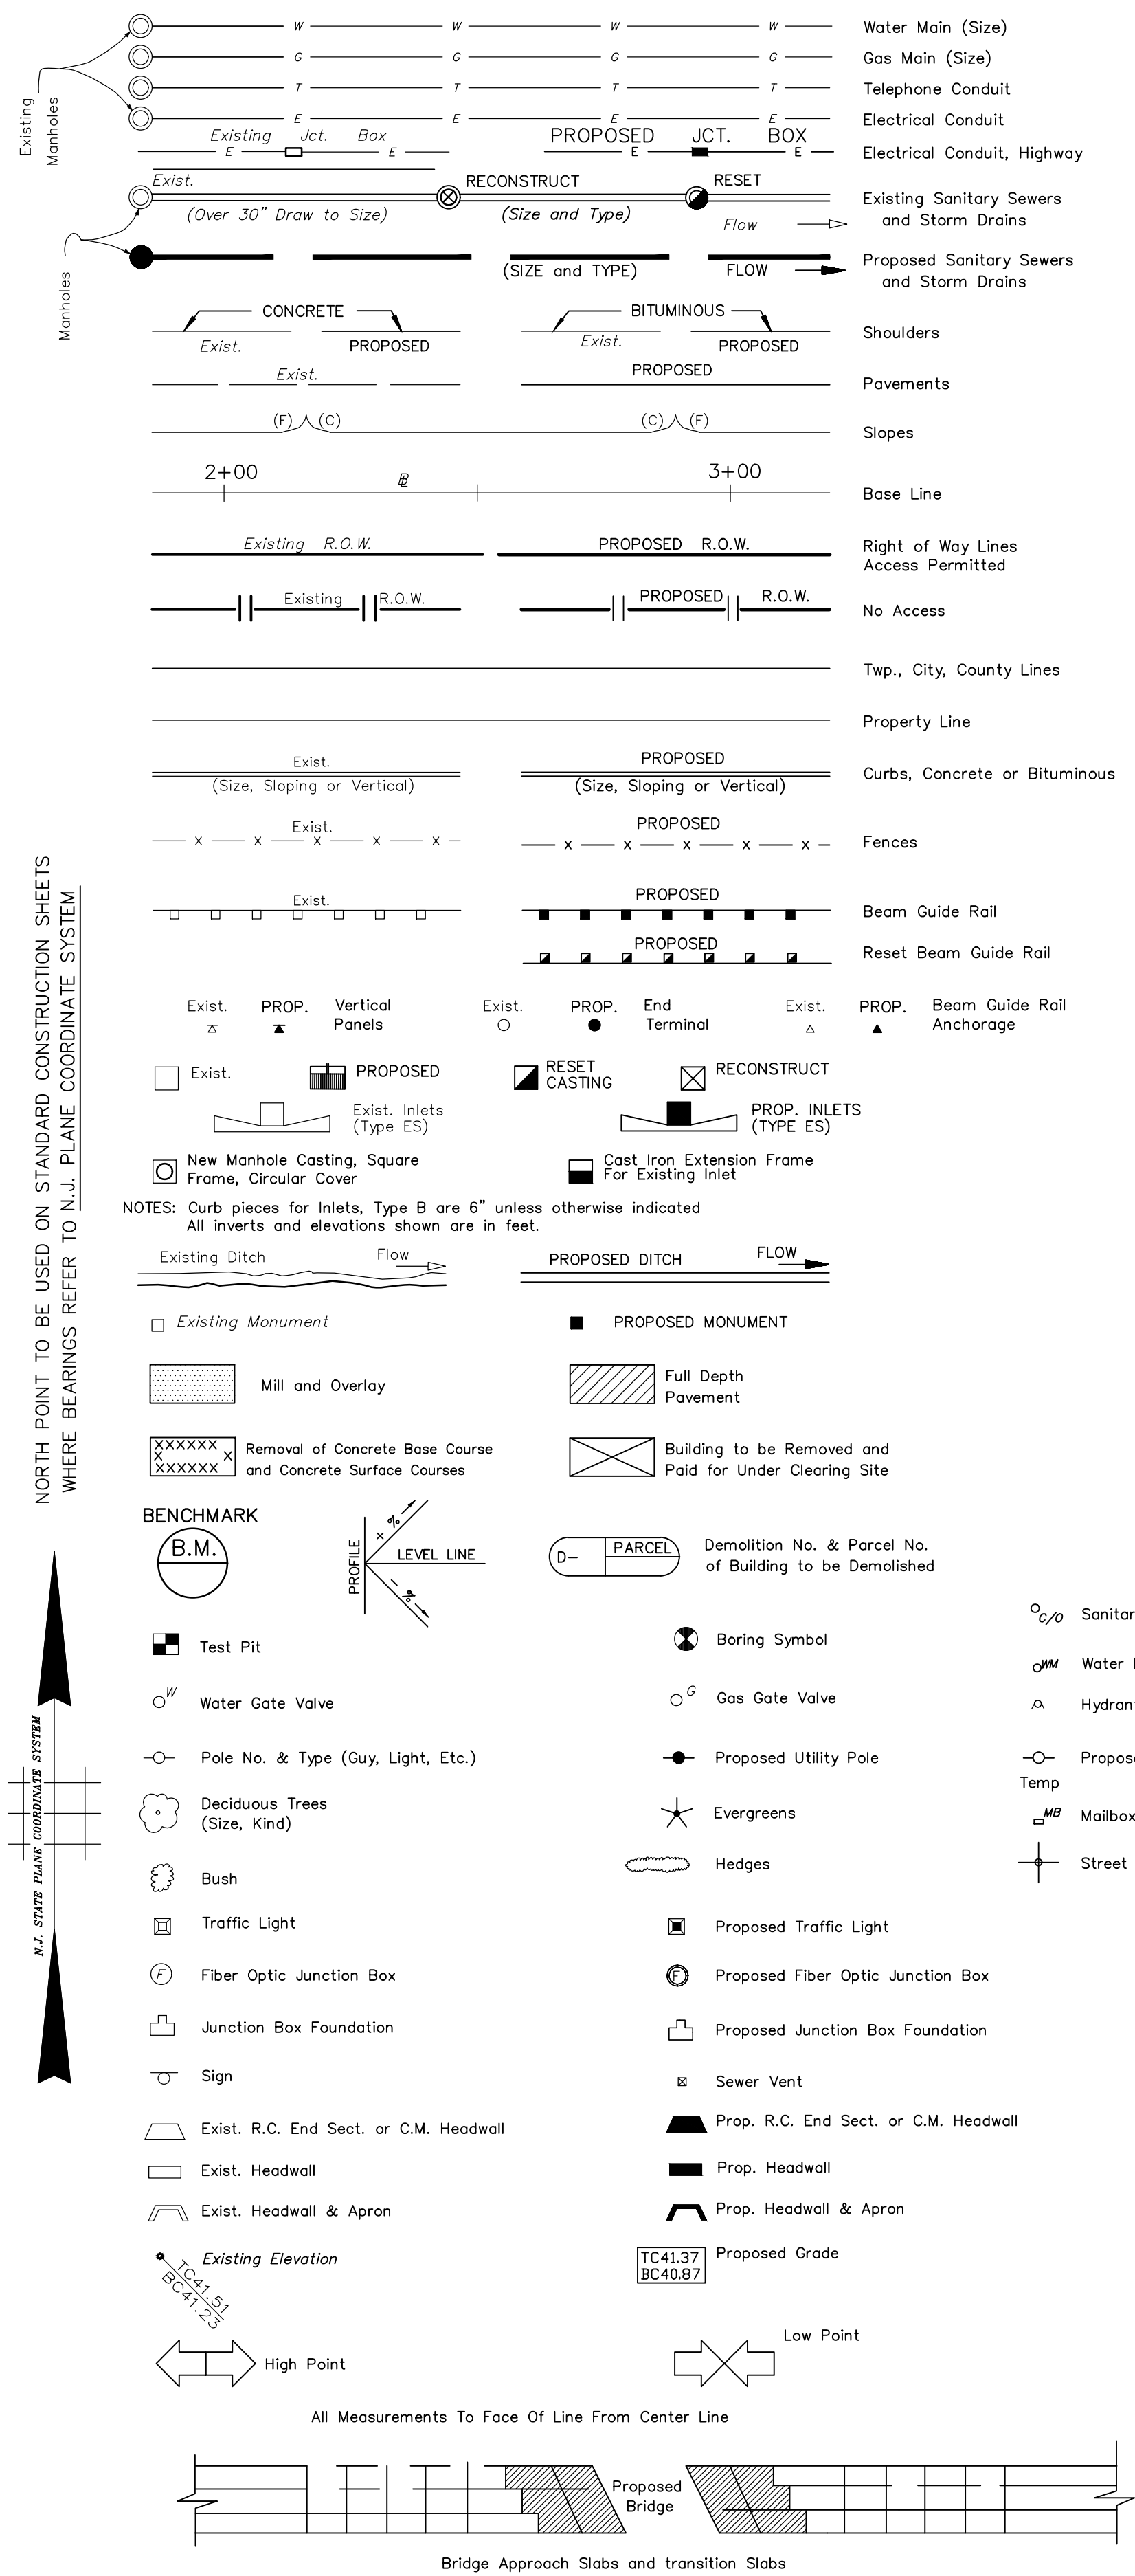

BID ITEMS AND QUANTITIES

Item No.	Description	Unit	Quantity
1	CLEARING SITE	LS	1
2	PRE-CONSTRUCTION VIDEO	LS	1
3	INLET FILTER, TYPE 1	SF	30
4	BREAKAWAY BARRICADE WITH SIGN	LN	4
5	CONSTRUCTION SIGNS	SF	30
6	DRUM	LN	8
7	TRAFFIC CONE	LN	50
8	TRAFFIC DIRECTOR, FLAGGER	HR	450
9	CONCRETE SIDEWALK, REINFORCED, 4" THICK	SY	1150
10	DETECTABLE WARNING SURFACE	SY	6
11	REMOVE AND RESET BRICK PAVER WALKWAY	SY	35
12	CONCRETE DRIVEWAY, REINFORCED, 6" THICK	SY	370
13	8"x18" CONCRETE VERTICAL CURB	LF	3,595
14	GRANITE CURB	LF	30
15	HOT MIX ASPHALT DRIVEWAY, 2" THICK	SY	200
16	GRAVEL DRIVEWAY	SY	25
17	REMOVE AND RESET BRICK PAVER DRIVEWAY	SY	100
18	MILLING, 0"-3" DEPTH	SY	8,225
19	SUPERPAVE HOT MIX ASPHALT SURFACE COURSE (2")	TON	1025
20	TACK COAT	GAL	400
21	RESET EXISTING CASTING	LN	2
22	RESET WATER VALVE BOX	LN	24
23	RESET GAS VALVE BOX	LN	8
24	INLET, TYPE 'B'	LN	5
25	INLET, TYPE 'W', DOGHOUSE	LN	1
26	MANHOLE	LN	1
27	MANHOLE, DOGHOUSE	LN	1
28	HDPE PIPE, 15" DIAMETER	LF	855
29	SANITARY SEWER SERVICE CONNECTION	LN	6
30	REGULATORY AND WARNING SIGN	SF	60
31	TRAFFIC STRIPES, THERMOPLASTIC, 4"	LF	1350
32	EXCAVATION, TEST PIT	CY	110
33	TREE REMOVAL, UP TO 12" CAL. DBH	LN	2
34	TREE REMOVAL, OVER 12" CAL. DBH	LN	3
35	TOPSOILING (4" THICK)	SY	1350
36	SODDING	SY	1350

GENERAL NOTES:

- LIMIT OF PAVING, THE CONTRACTOR SHALL SAWCUT OR MILL STRAIGHT LINE AS DIRECTED BY THE ENGINEER TO MEET EXISTING.
- INSTALLATION OF SURFACE COURSE SHALL NOT BE ALLOWED UNTIL THE BASE COURSE IS APPROVED BY THE ENGINEER. THE ENGINEER WILL DIRECT THE CONTRACTOR TO MAKE CORRECTIVE MEASURES TO THE BASE COURSE PRIOR TO INSTALLING THE SURFACE COURSE. ALL COSTS FOR CORRECTIVE WORK, IF ANY, SHALL BE INCLUDED IN THE VARIOUS ITEMS IN THE PROPOSAL.
- NO SEPARATE PAYMENT SHALL BE MADE TO SAWCUT EXISTING PAVEMENT, DRIVEWAYS, OR SIDEWALKS, INCLUDE ALL COSTS IN THE VARIOUS ITEMS IN THE PROPOSAL.
- HOT MIX ASPHALT BASE COURSE AREAS SHALL BE PARALLEL TO THE ROADWAY CENTERLINE AND RECTANGULAR IN SHAPE AND EDGES SHALL BE SQUARE.
- NO SEPARATE PAYMENT WILL BE MADE FOR ROADWAY EXCAVATION OF ANY KIND, INCLUDE ALL COST IN THE VARIOUS ITEMS.
- THE CONTRACTOR SHALL PRESERVE AND PROTECT ALL PROPERTY CORNERS, DURING CONSTRUCTION, ANY PROPERTY CORNERS DISTURBED SHALL BE RESET AT THE EXPENSE OF THE CONTRACTOR.
- THE CONTRACTOR SHALL PROVIDE SLEEVES IN CURB FACE FOR ROOF DRAINS AND SUMP PUMP PIPES WHERE REQUIRED.
- THE CONTRACTOR SHALL CONTACT THE UTILITY COMPANIES TO COORDINATE ANY WORK THAT MAY NEED TO BE CONDUCTED WITHIN THE LIMITS OF WORK.
- THE CONTRACTOR SHALL MAINTAIN EXISTING DRAINAGE PATTERNS IN YARDS AND PRIVATE PROPERTIES ALONG PROPOSED SIDEWALK AND DRIVEWAY INSTALLATIONS.
- HEDGES, BUSHES, LANDSCAPE TIES, STONE EDGING, STONE WALLS, SIGNS, LANDSCAPE MATERIAL, MAILBOXES, FENCES, AND EDGING MATERIAL FOR DRIVEWAYS, SIDEWALKS, AND ROADWAY WIDENING SHALL BE RESET OR REPLACED AS DIRECTED BY THE ENGINEER. NO SEPARATE PAYMENT SHALL BE MADE, INCLUDE ALL COSTS IN THE VARIOUS ITEMS IN THE PROPOSAL. TREE CLEARING AND TRIMMING SHALL BE INCLUDED IN THE COST OF CLEARING SITE.
- THE CONTRACTOR SHALL INSTALL TRAFFIC STRIPES (CROSSWALKS, STOP BARS, AND DOUBLE-YELLOW) AS DIRECTED BY ENGINEER.
- ALL TRAFFIC CONTROL SIGNS AND STRIPING SHALL BE IN ACCORDANCE WITH THE M.U.T.C.D. HANDBOOK. EXACT LOCATION AND TYPE OF STREET SIGNS SHALL BE DETERMINED BY ENGINEER.
- ALL TREES ADJACENT TO OR WITHIN THE LIMITS OF WORK ARE NOT TO BE DISTURBED UNLESS OTHERWISE DIRECTED BY THE ENGINEER. THE CONTRACTOR SHALL PROTECT TREES DURING ALL CONSTRUCTION RELATED ACTIVITIES.
- THE TOPSOIL USED FOR THIS PROJECT SHALL BE IN STRICT ACCORDANCE WITH THE PROJECT SPECIFICATIONS. ANY TOPSOIL NOT MEETING WITH THE ENGINEER'S APPROVAL SHALL BE REMOVED AND REPLACED AT CONTRACTOR'S EXPENSE.
- THE CONTRACTOR IS RESPONSIBLE FOR MAKING HIS/HER OWN DETERMINATIONS AS TO THE TYPE AND LOCATION OF UNDERGROUND UTILITIES AS MAY BE NECESSARY TO AVOID DAMAGE THERETO.
- EXISTING UTILITY INFORMATION SHOWN HEREON HAS BEEN COLLECTED FROM VARIOUS SOURCES AND IS NOT GUARANTEED AS TO ACCURACY OR COMPLETENESS. THE CONTRACTOR SHALL VERIFY ALL INFORMATION TO HIS SATISFACTION PRIOR TO EXCAVATION. WHERE EXISTING UTILITIES ARE TO BE CROSSED BY PROPOSED CONSTRUCTION, TEST PITS SHALL BE DUG BY THE CONTRACTOR PRIOR TO CONSTRUCTION TO ASCERTAIN EXISTING INVERTS, MATERIALS AND SIZES. TEST PIT INFORMATION SHALL BE GIVEN TO THE ENGINEER PRIOR TO CONSTRUCTION TO PERMIT ADJUSTMENTS AS REQUIRED TO AVOID CONFLICTS.
- THE CONTRACTOR SHALL NOTIFY THE ENGINEER IMMEDIATELY IF ANY FIELD CONDITIONS ENCOUNTERED DIFFER MATERIALLY FROM THOSE REPRESENTED HEREON.
- ALL MATERIALS, WORKMANSHIP, AND CONSTRUCTION FOR SITE IMPROVEMENTS SHOWN HEREON SHALL BE IN ACCORDANCE WITH N.J. DEPARTMENT OF TRANSPORTATION "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION", AS CURRENTLY AMENDED.
- THE BASE MAP INDICATING EXISTING CONDITIONS WAS PREPARED BY VALLEE SURVEY.
- CENTERLINE GRADES SHALL MATCH TOP OF CURB ELEVATIONS, UNLESS OTHERWISE NOTED ON THE PLANS OR DIRECTED BY THE ENGINEER.
- CONTRACTOR SHALL PROVIDE SURVEY AND STAKEOUT FOR THE ROADWAY AND AREA OF WORK. INCLUDE ALL COSTS IN OTHER ITEMS BID IN THE SCHEDULE OF PRICES. DISCREPANCIES WITH PROPOSED GRADING SHALL BE REVIEWED WITH ENGINEER.
- CONTRACTOR SHALL PROVIDE A PRE-CONSTRUCTION VIDEO PERFORMED BY A PROFESSIONAL VIDEOGRAPHER. INCLUDE ALL COSTS IN THE "CLEARING SITE" PAY ITEM IN THE SCHEDULE OF PRICES.
- IN THE EVENT OF WORK BEING SUSPENDED BY UNSUITABLE WEATHER CONDITIONS, THE CONTRACTOR, AT THEIR EXPENSE, SHALL DO ALL THE WORK NECESSARY TO PROVIDE A SAFE, SMOOTH, WELL DRAINED AND UNOBSTRUCTED PASSAGEWAY THROUGH AND ADJACENT TO THE CONSTRUCTION AREA FOR USE BY THE PUBLIC AND EMERGENCY AND MAINTENANCE VEHICLES DURING THE PERIOD OF SHUT-DOWN.
- CONTRACTOR SHALL MEASURE EXISTING INLET CASTING AND SUBMIT SHOP DRAWINGS FOR ENGINEER'S APPROVAL FOR ECO-GRATES AND CURB PIECES AND SUPPLY AND INSTALL SAME.
- CURB RAMPS SHALL BE INSTALLED AT LOCATIONS DIRECTED BY ENGINEER. DETECTABLE WARNING PUBLIC SIDEWALK CURB RAMP DELINEATION SHALL BE PROVIDED IN ACCORDANCE WITH SECTION 607 OF THE SPECIFICATIONS AND THE SPECIAL PROVISIONS WHICH INCLUDE A LIST OF ACCEPTABLE SYSTEMS. UNLESS A SPECIFIC DELINEATION SYSTEM IS REQUIRED BY THE SPECIAL PROVISIONS, THE CONTRACTOR SHALL SUBMIT SHOP DRAWINGS OF VARIOUS SYSTEMS AND COLORS TO THE OWNER FOR APPROVAL. ONLY ONE SYSTEM MAY BE USED ON ANY PROJECT.
- CURB RAMPS SHALL BE INSTALLED IN ACCORDANCE WITH THE DETAILS. TYPE OF CURB RAMP SHALL BE DETERMINED BY THE ENGINEER PRIOR TO INSTALLATION.
- CONTRACTOR SHALL PROVIDE SHOP DRAWINGS FOR WALL DESIGN, SIGNED AND SEALED BY A NJ PROFESSIONAL ENGINEER.
- THESE GENERAL NOTES APPLY TO ALL SHEETS IN THIS SET OF PLANS.

LEGEND, NOTES, AND CONTRACT QUANTITIES

IMPROVEMENTS TO HARRISON AVENUE



BOROUGH OF FAIR HAVEN
748 River Road, Fair Haven, NJ 07704
phone: 732.747.0241 fax: 732.747.6962
website: www.fairhavennj.org


Scale: NONE Project No. 21-01

Drawn by: RG Designed by: RG

Richard Gardella
RICHARD GARDELLA, PE, PP, CME, CPWM
PROFESSIONAL ENGINEER
New Jersey License No. 43747

DATE: 02/26/2021

Sheet Number: 2 of 7

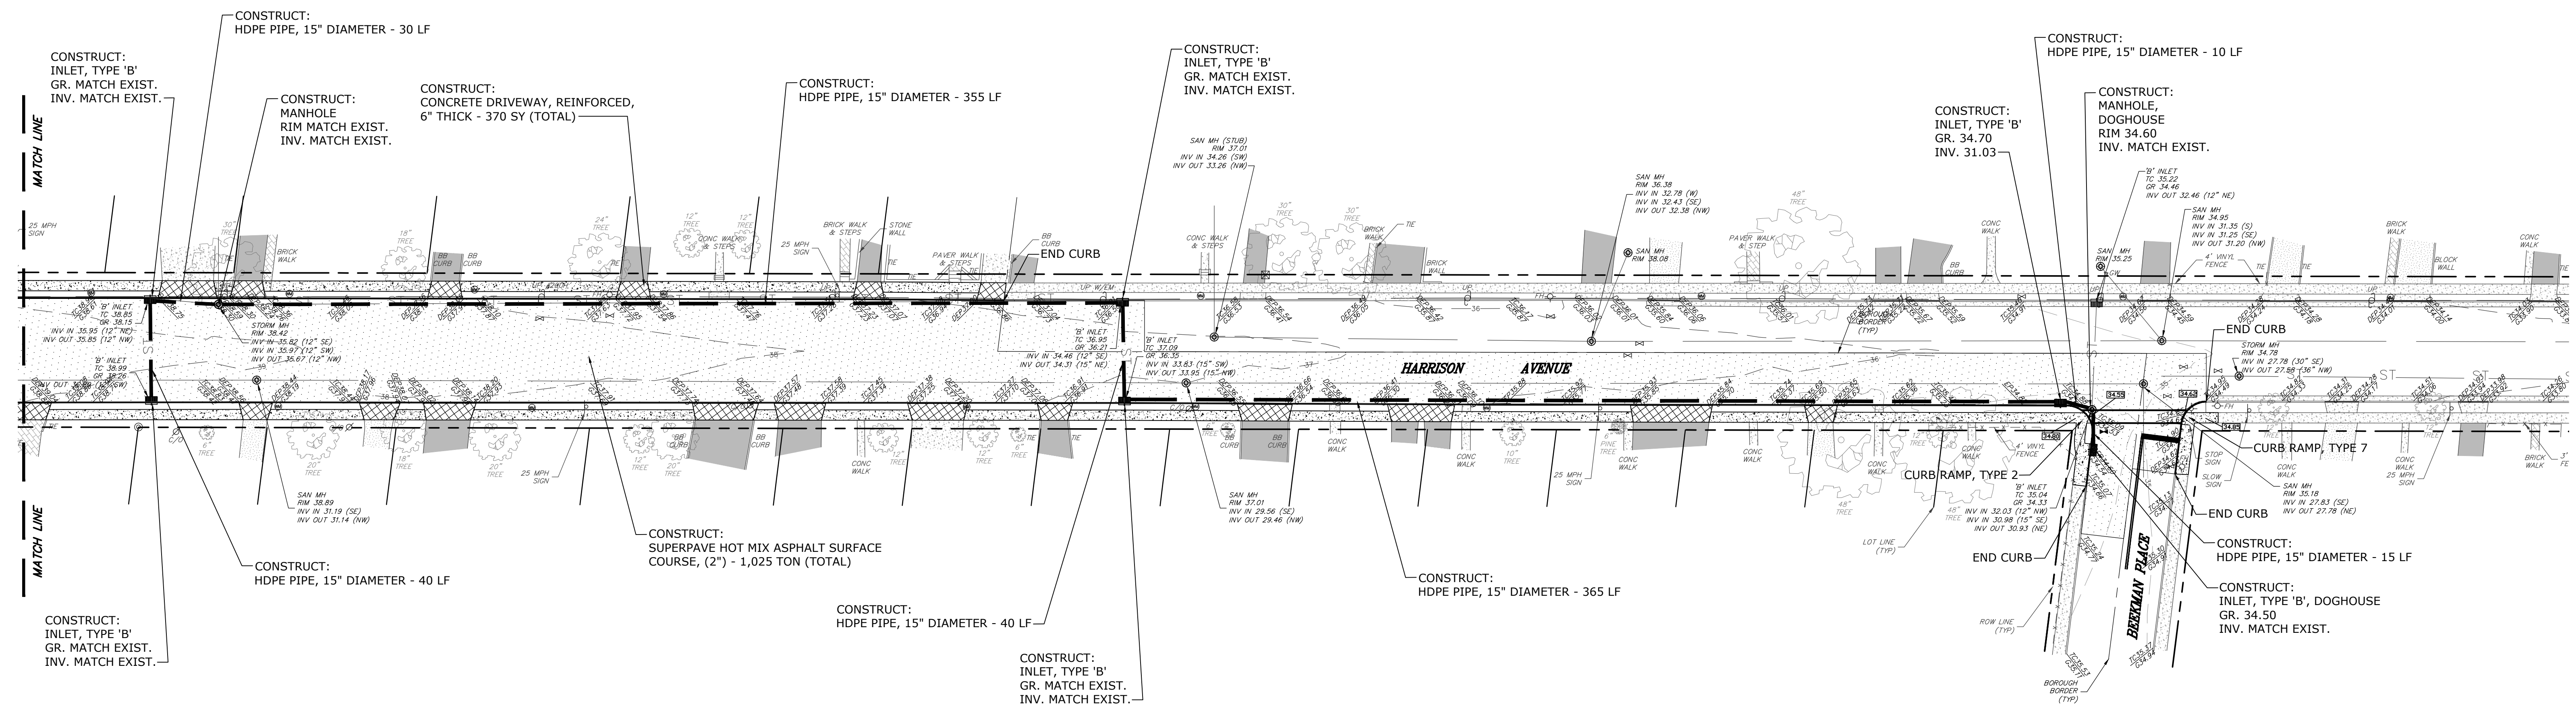

CONSTRUCTION PLAN

IMPROVEMENTS TO HARRISON AVENUE



BOROUGH OF FAIR HAVEN
 748 River Road, Fair Haven, NJ 07704
 phone: 732.747.0241 fax: 732.747.6962
 website: www.fairhavennj.org


R. Gardella
 RICHARD GARDELLA, PE, PP, CME, CPWM
 PROFESSIONAL ENGINEER
 New Jersey License No. 43747

DATE: 02/26/2021

Scale: 1" = 30'
 Project No. 21-01


Drawn by: RG
 Designed by: RG

Sheet Number: 4
 of 7

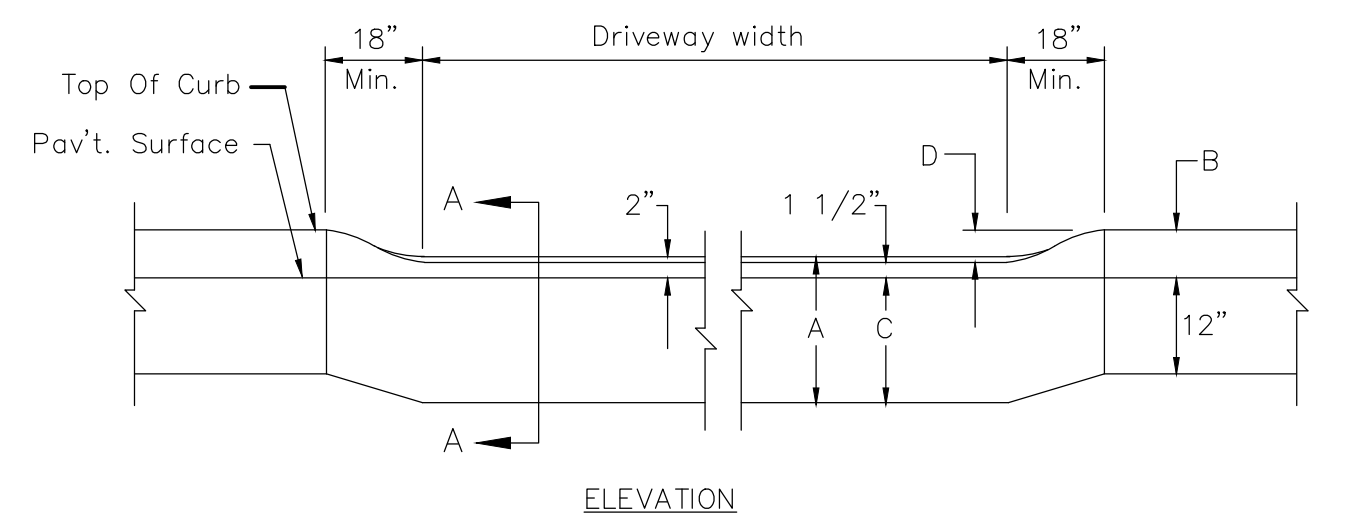

CURB SIZE	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E
8" X 18"	18"	6"	16"	4 1/2"	8"
8" X 20"	20"	8"	18"	6 1/2"	8"


METHOD OF DEPRESSING CURB AT DRIVEWAYS
NOT TO SCALE

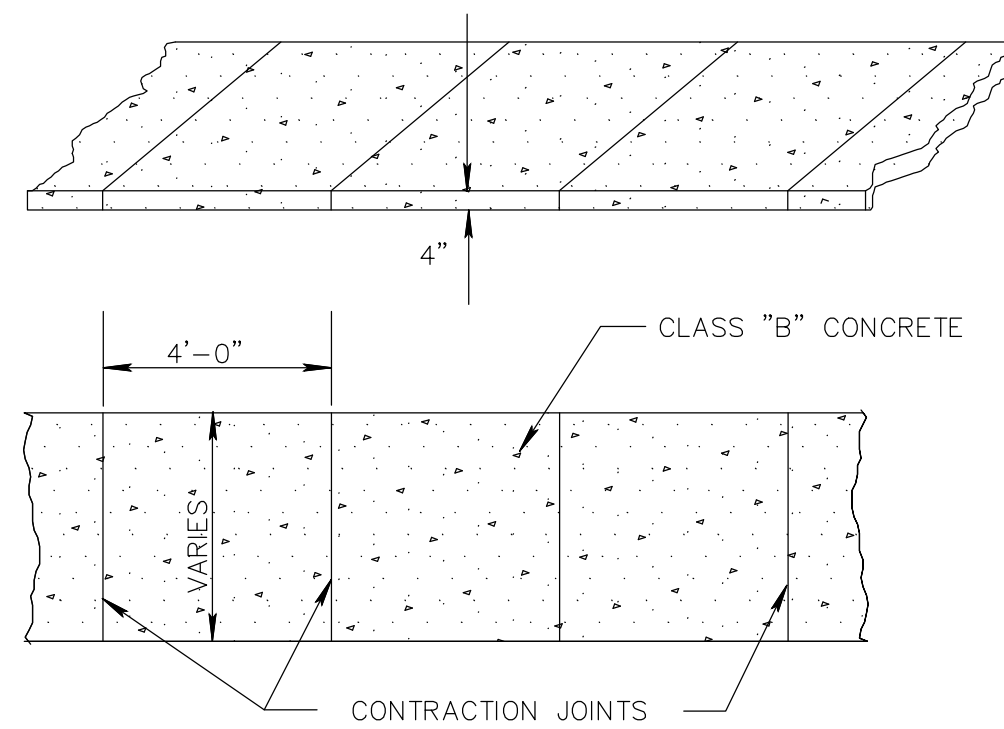


TYPICAL DETAIL CONCRETE SIDEWALK
NOT TO SCALE

NOTES:


1. PREFORMED BITUMINOUS EXPANSION JOINTS, 1/2" THICK SHALL BE INSTALLED EVERY 20 FEET. CONTRACTION JOINTS SHALL BE INSTALLED EVERY 4 FEET.
2. CONCRETE SHALL BE CLASS "B" PORTLAND CEMENT HAVING A 28 DAY STRENGTH OF 4000 PSI.

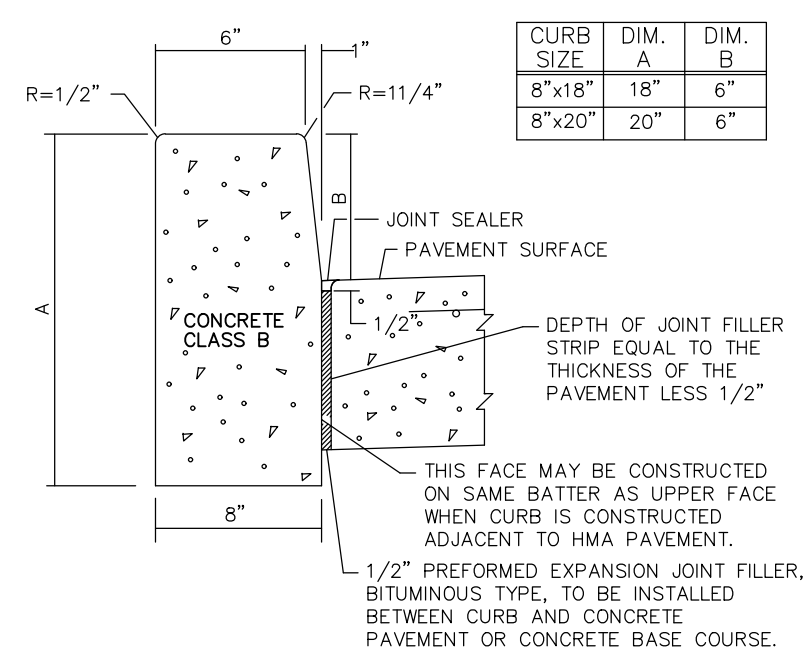


CONCRETE VERTICAL CURB
NOT TO SCALE

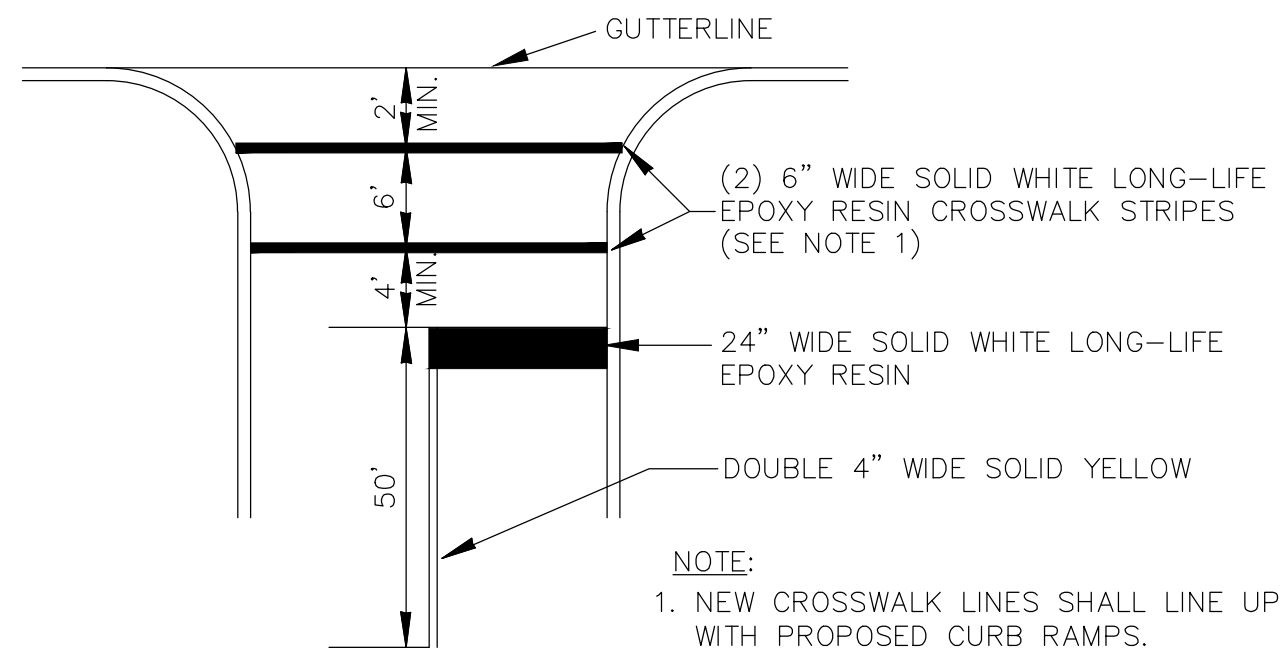


CROSSWALK AND STOP LINE STRIPING DETAIL
NOT TO SCALE

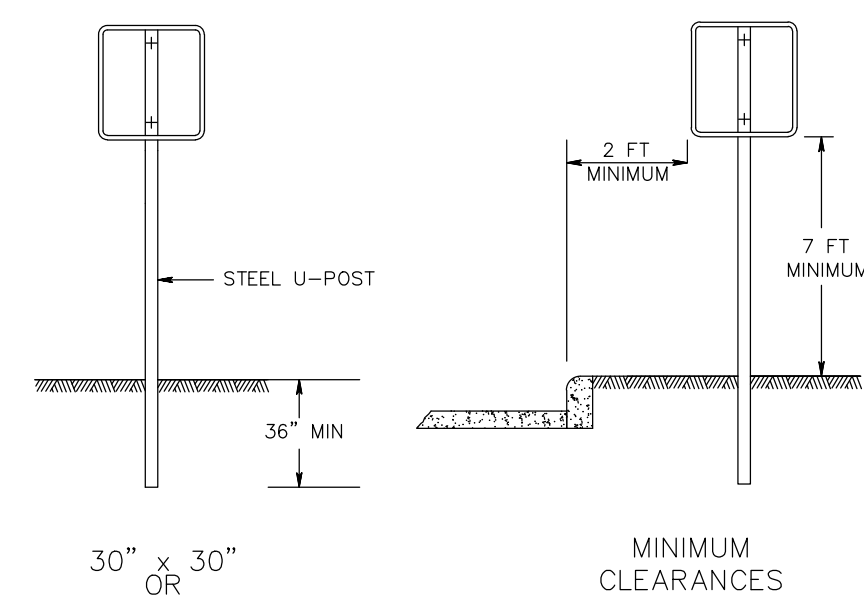

SIGNS
NOT TO SCALE

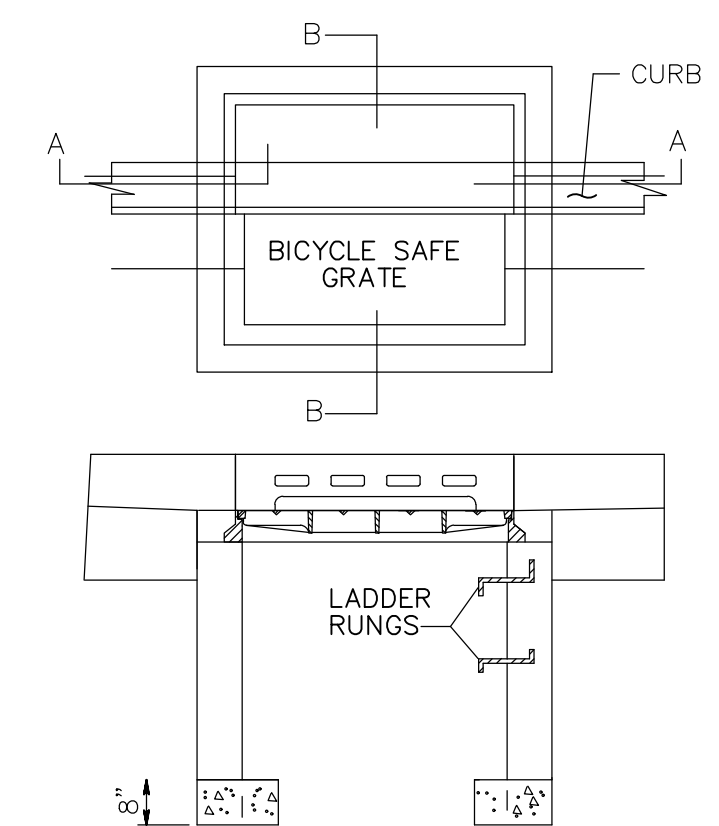


SECTION A-A

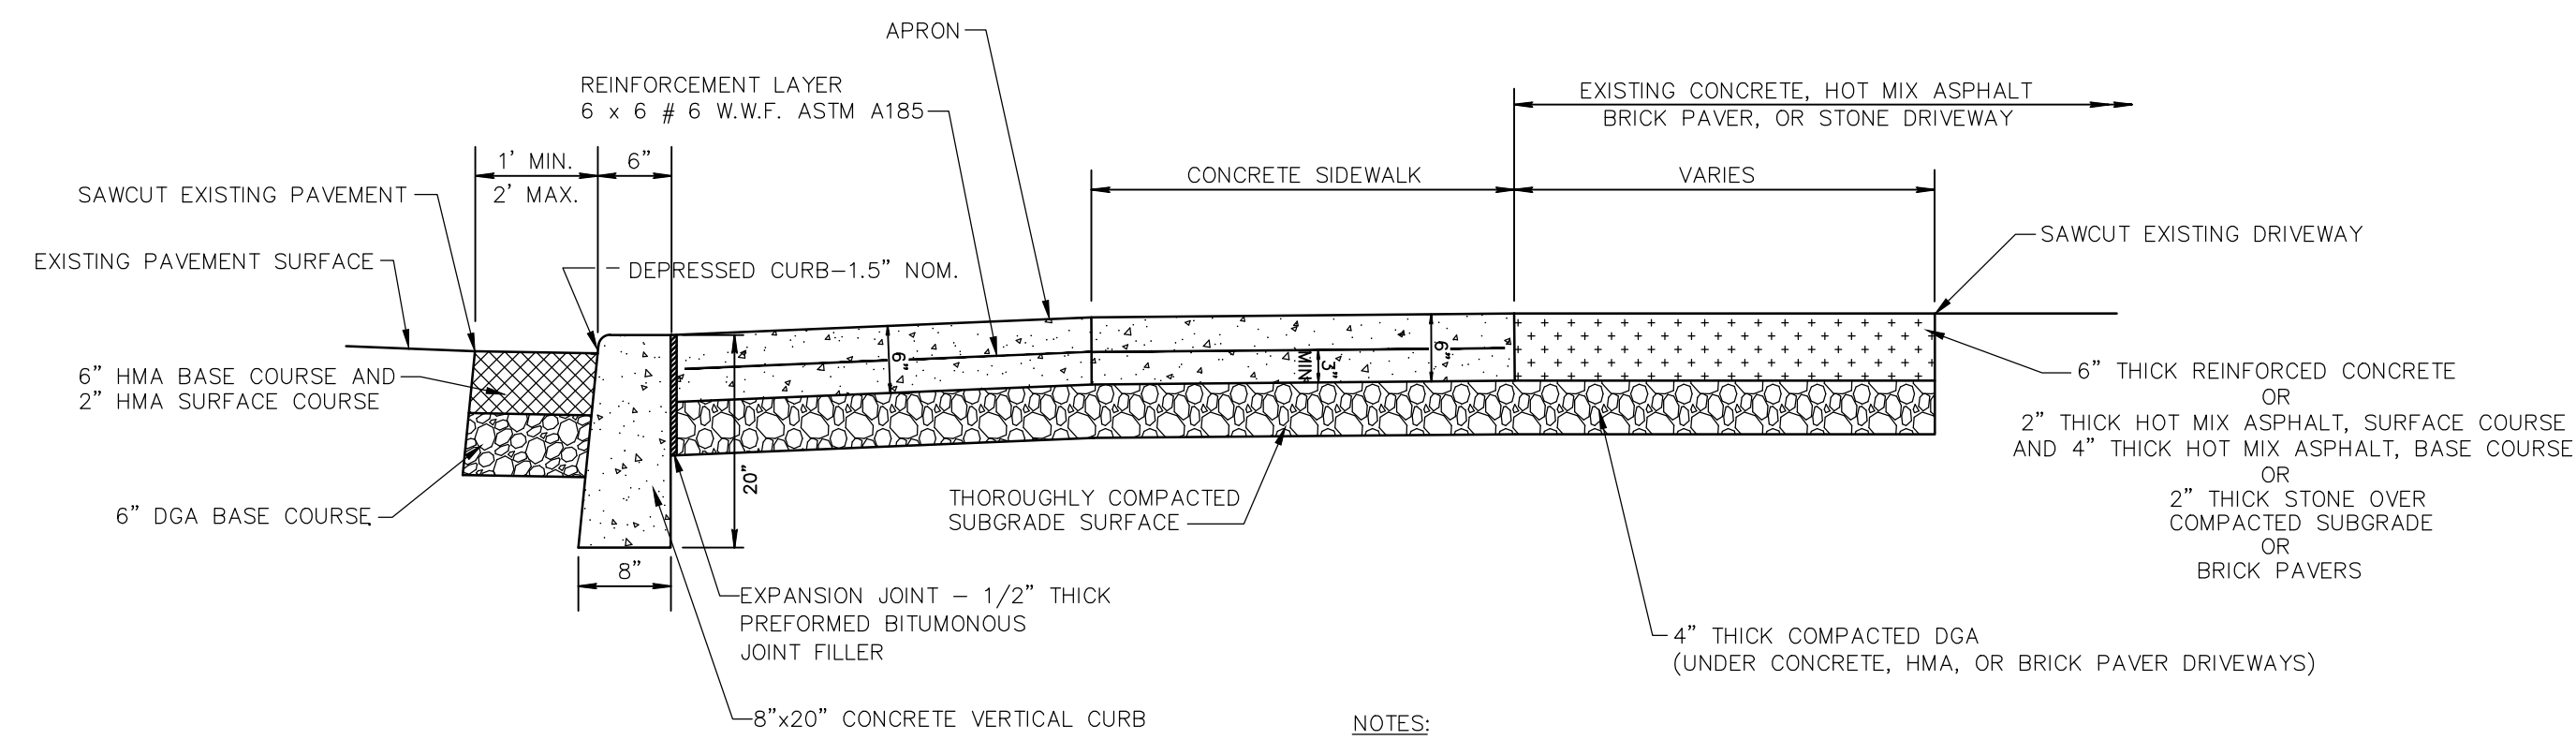


- NOTES:**
1. CONCRETE SHALL BE 4,000 P.S.I. AT 28 DAYS.
 2. CONCRETE APRON SHALL BE EVENLY DIVIDED WITH EXPANSION JOINTS SUCH THAT NO PANEL EXCEEDS 20' IN ANY DIMENSION.
 3. NO SEPARATE PAYMENT SHALL BE MADE FOR PAVEMENT REPAIR ALONG NEW CURBS. INCLUDE ALL COSTS IN THE PAY ITEM '8"x18" CONCRETE VERTICAL CURB'.

CONCRETE DRIVEWAY, REINFORCED, 6" THICK AND DRIVEWAY RESTORATION
NOT TO SCALE

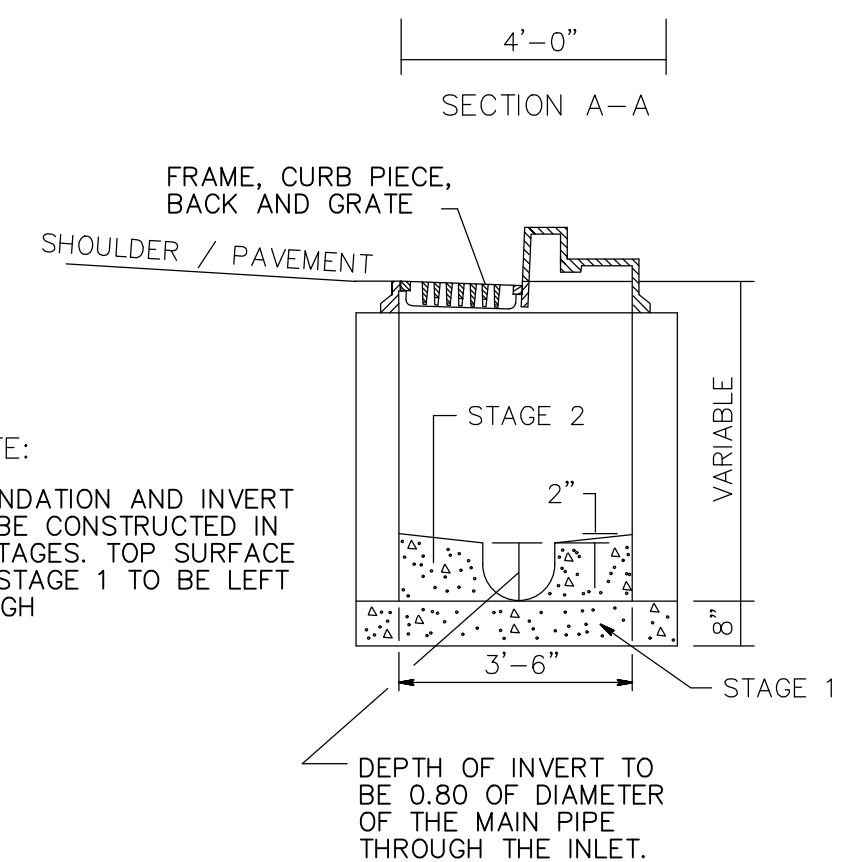


SECTION B-B

INLET, TYPE 'B'
NOT TO SCALE

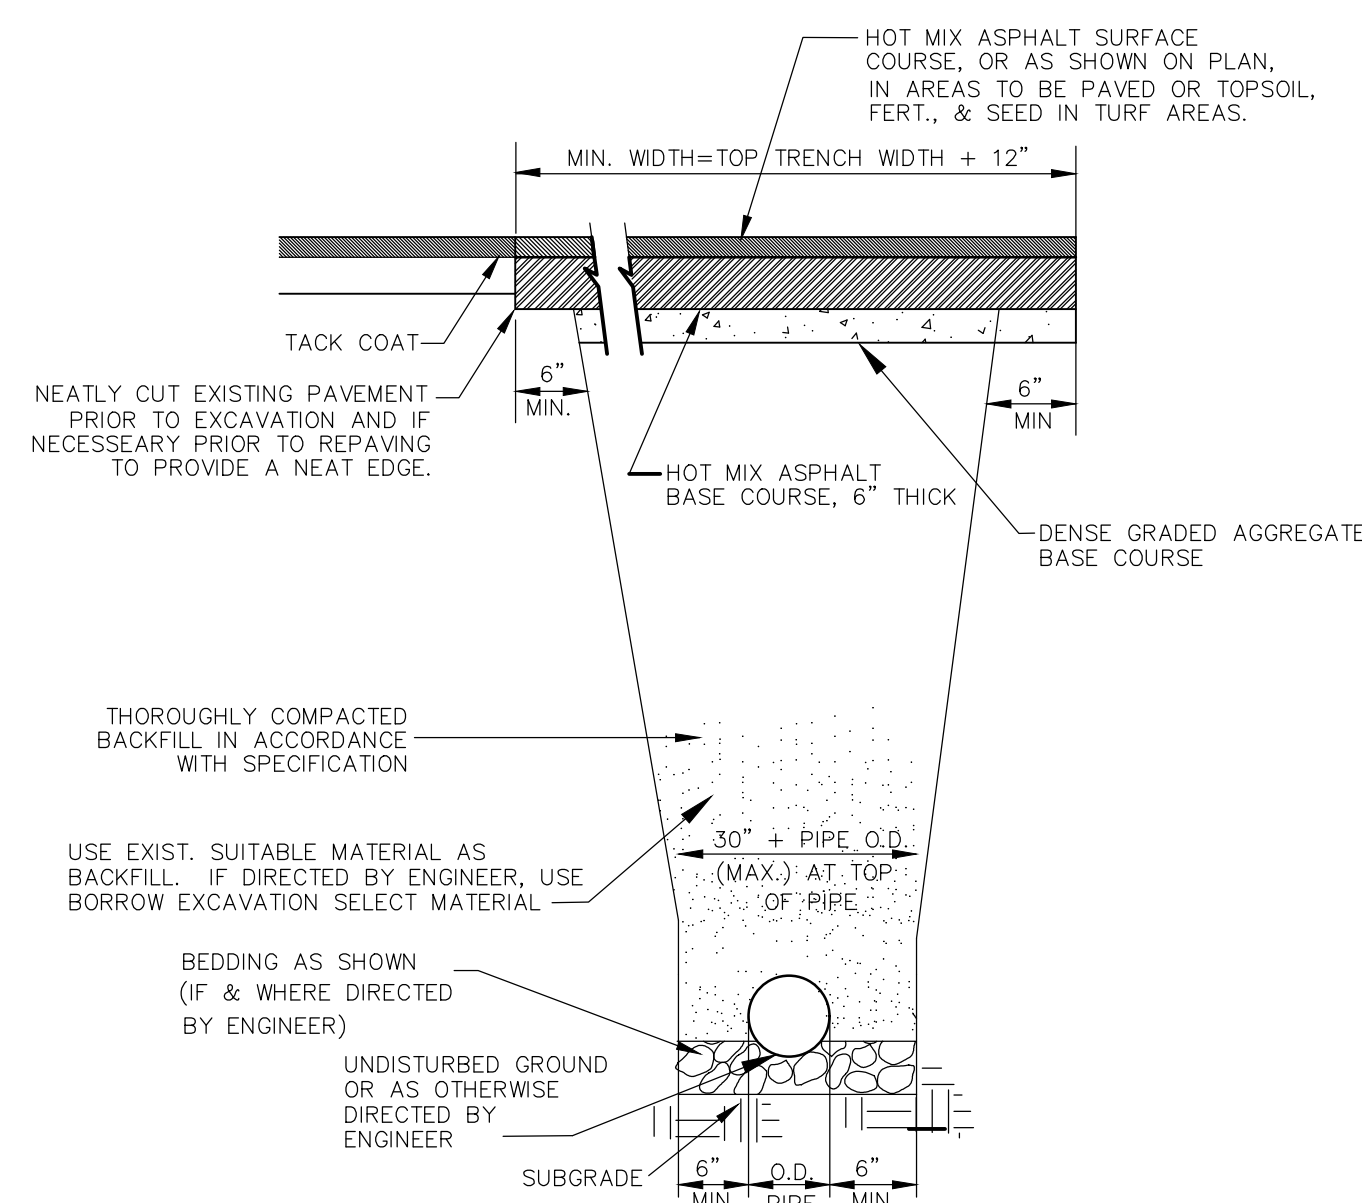


- CONSTRUCTION NOTES:**
- TEMPORARY PAVEMENT OF 6" THICK DGA AND 6" THICK HMA BASE COURSE TO BE MAINTAINED FOR A MINIMUM OF 60 DAYS PRIOR TO OVERLAY.

TRENCH REPAIR
NOT TO SCALE

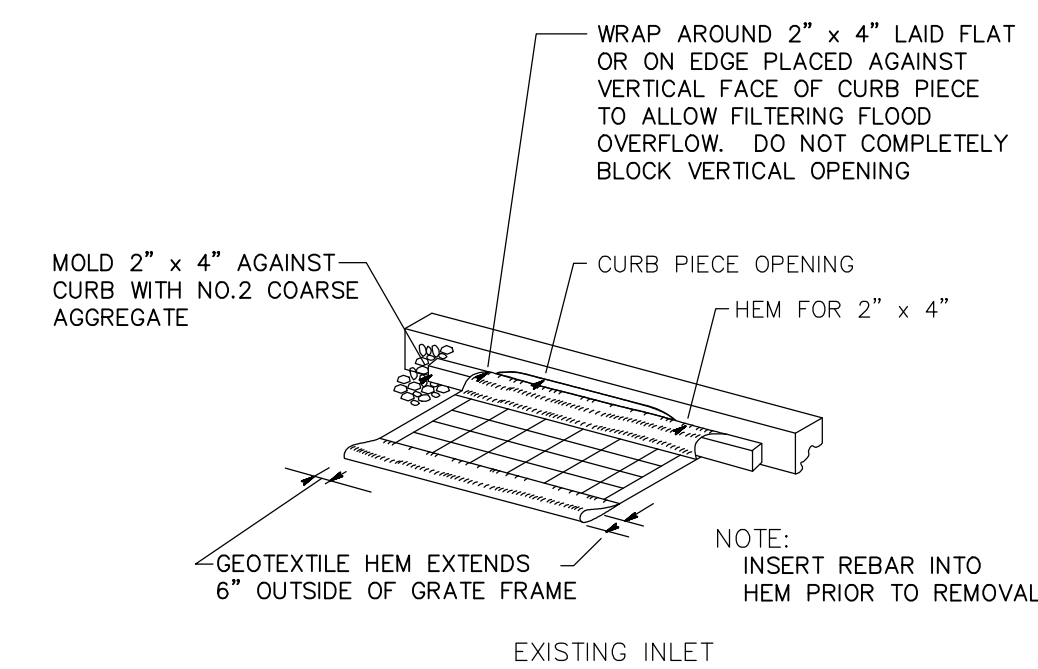



EXISTING INLET

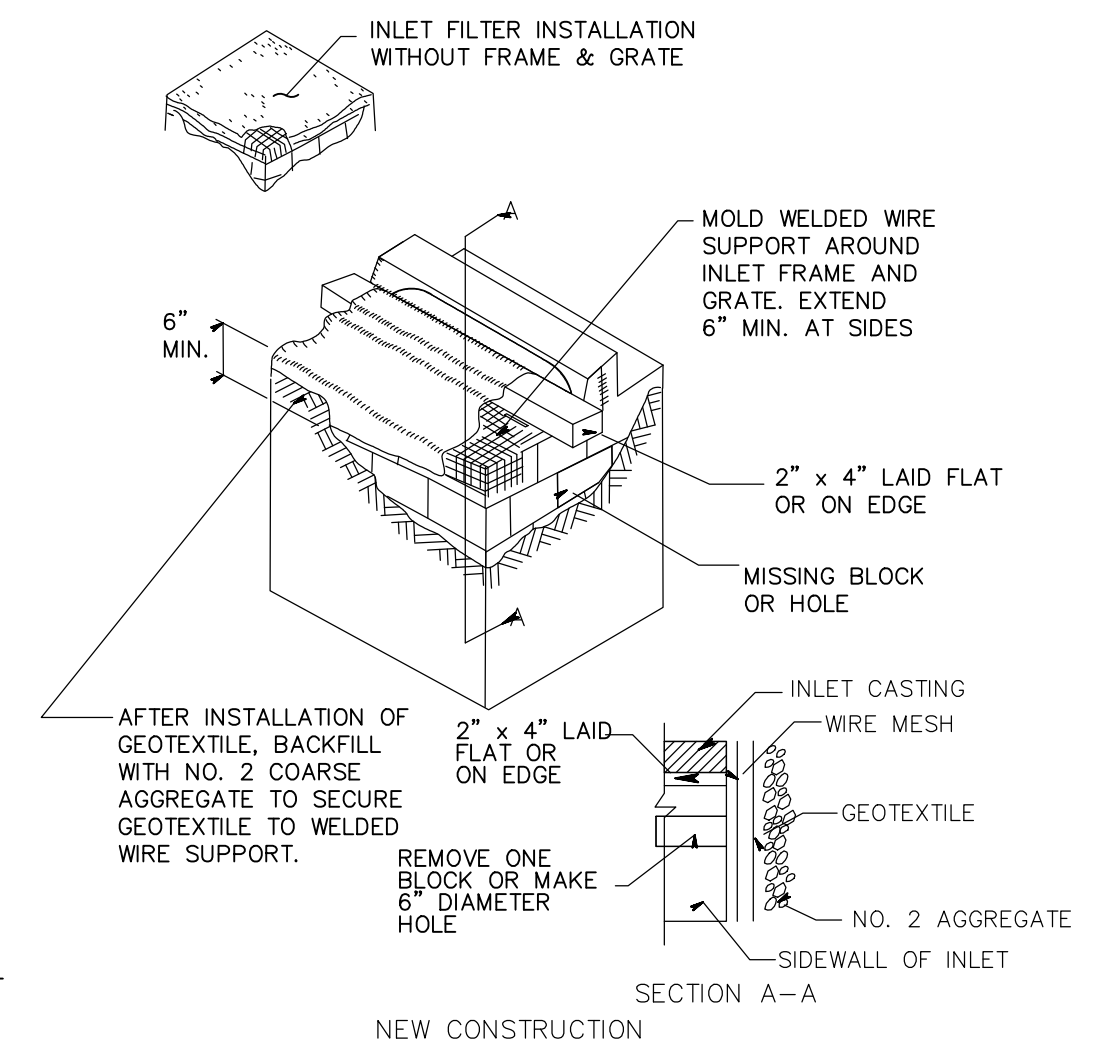






SECTION A-A

INLET FILTER, TYPE 2
NOT TO SCALE


CONSTRUCTION DETAILS			
IMPROVEMENTS TO HARRISON AVENUE			
	BOROUGH OF FAIR HAVEN 748 River Road, Fair Haven, NJ 07704 phone: 732.747.0241 fax: 732.747.6962 website: www.fairhavennj.org	Scale:	Project No.
		NONE	21-01
Drawn by:	Designed by:		
RG	RG		
SHEET NO. 5 RICHARD GARDELLA, PE, PP, CME, CPWM PROFESSIONAL ENGINEER New Jersey License No. 43747		DATE: 02/26/2021 Sheet Number: 5 of 7	

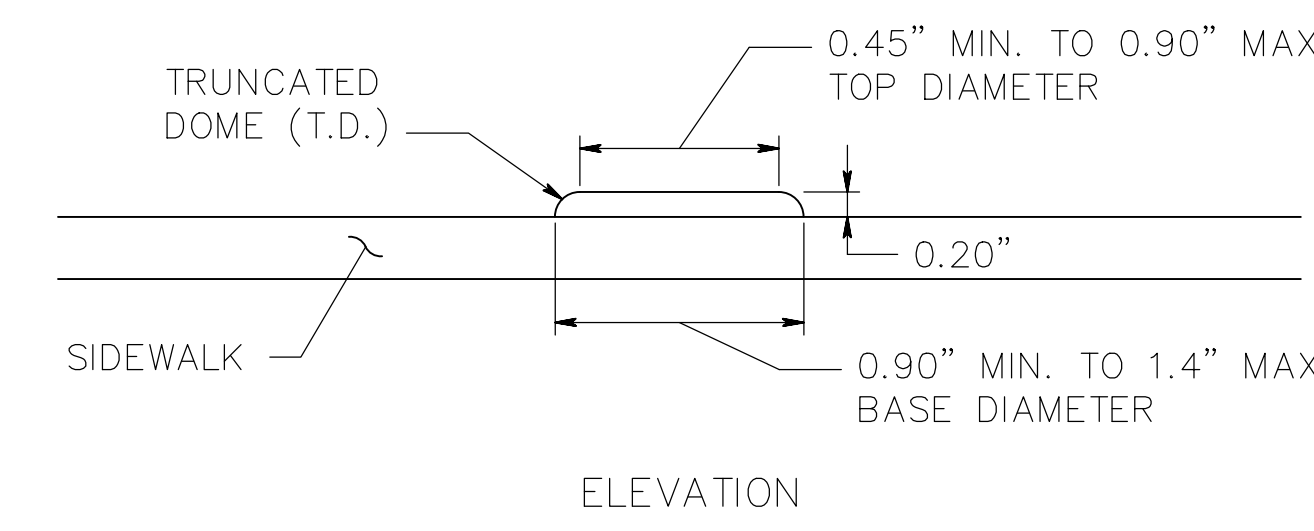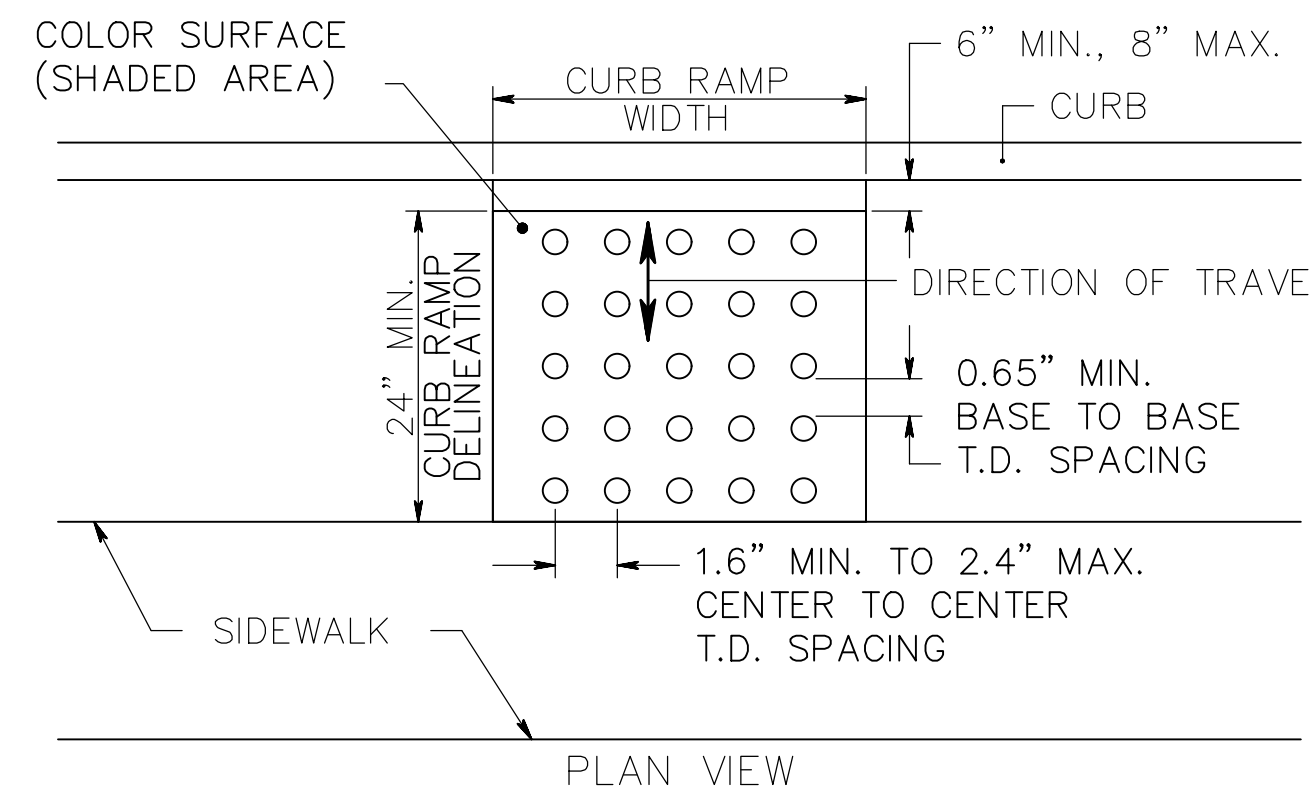


DETECTABLE WARNING SURFACE

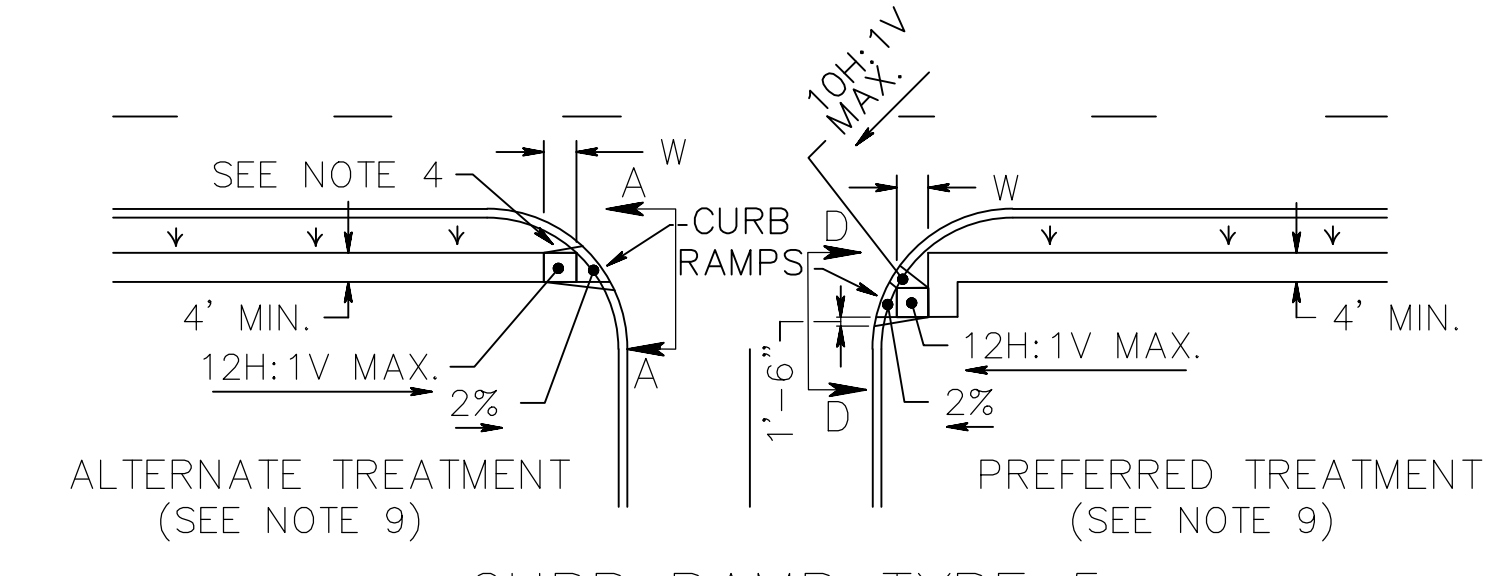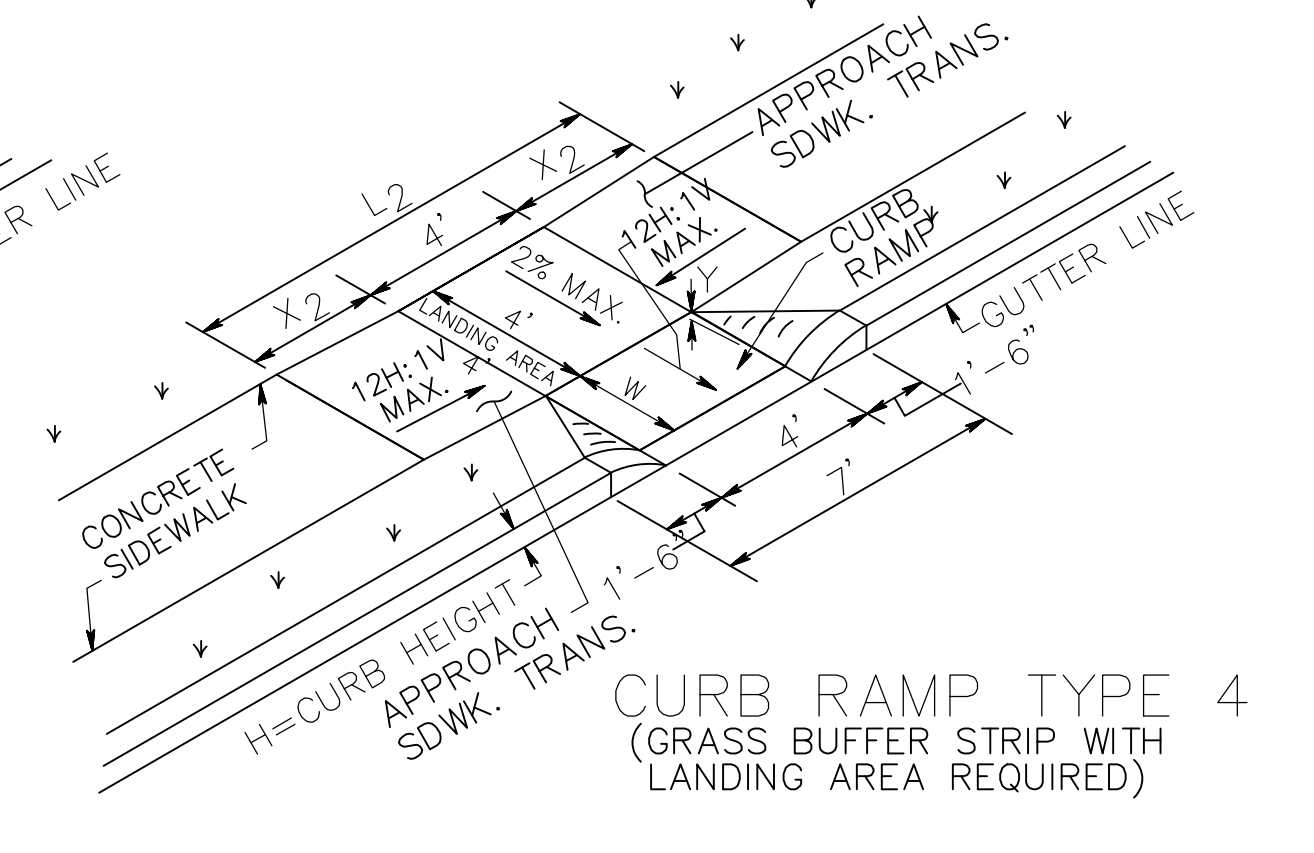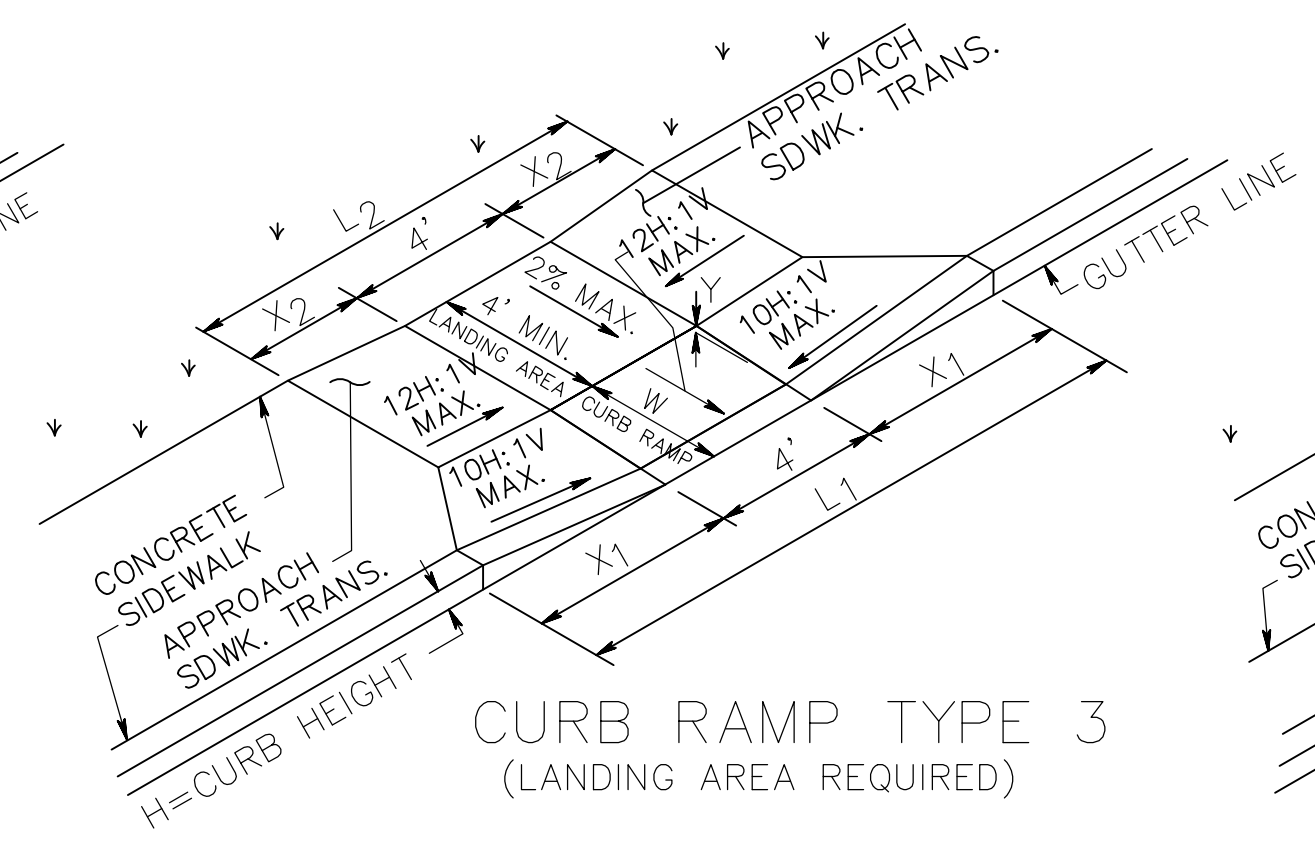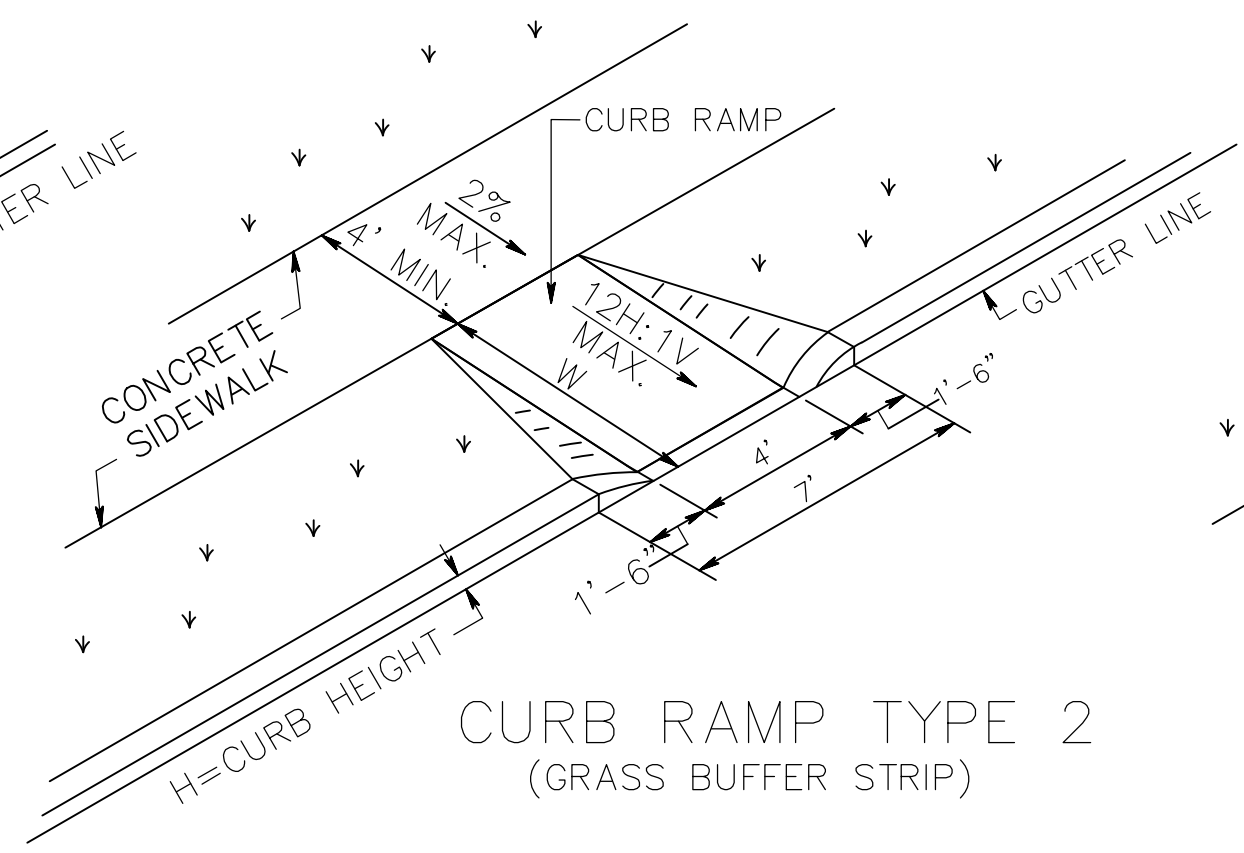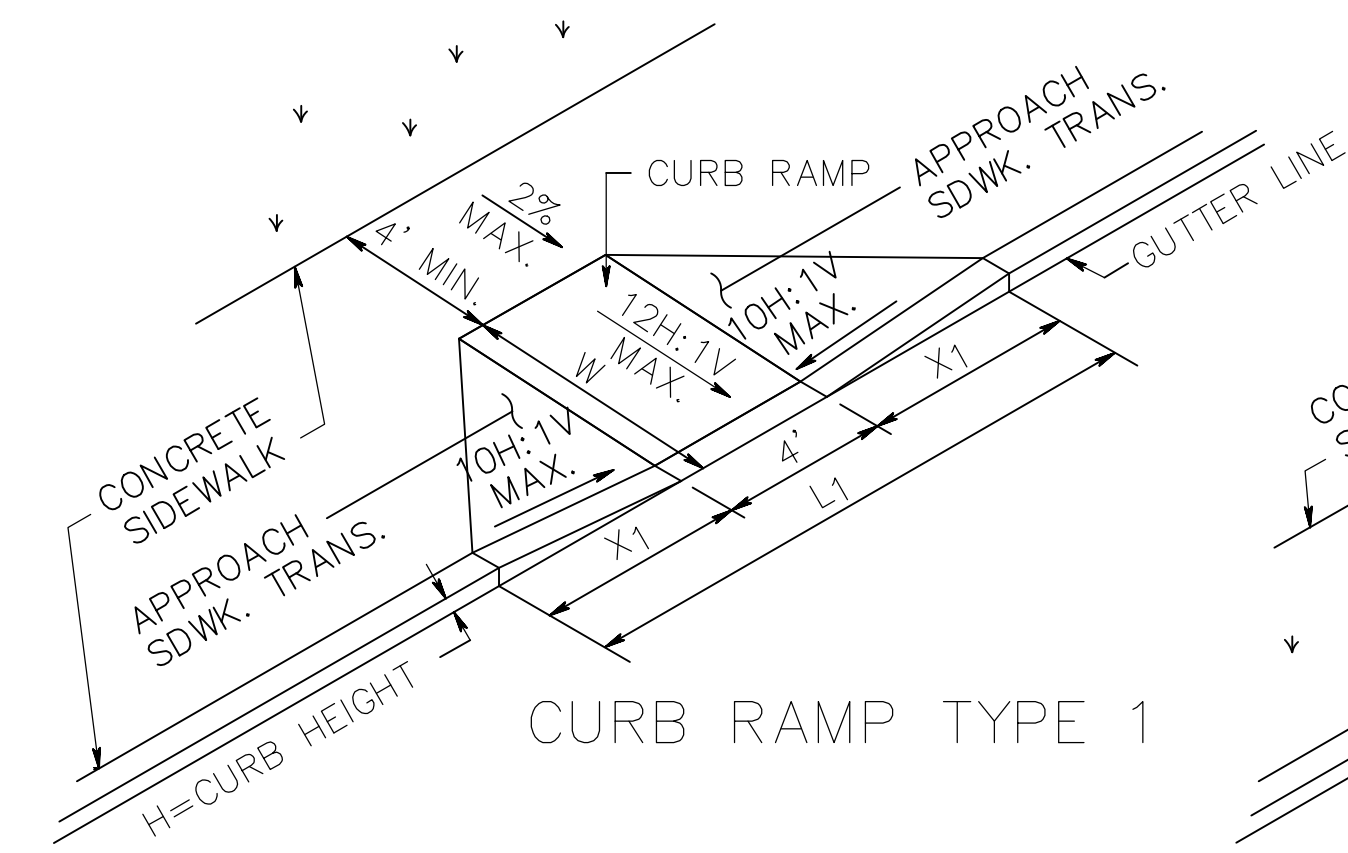

CURB RAMP TYPE 5 (CROSSING PARALLEL TO HIGHWAY ONLY)

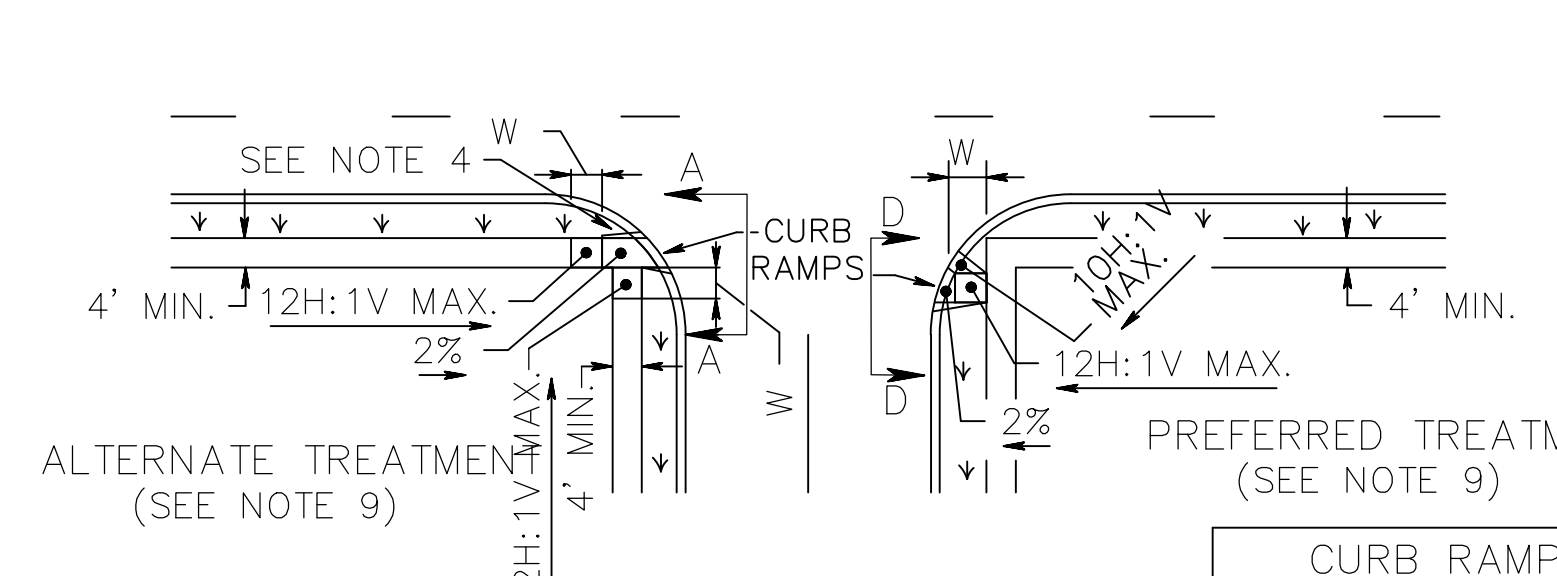


CURB RAMP TYPE 6 (CROSSING PARALLEL TO HIGHWAY ONLY)

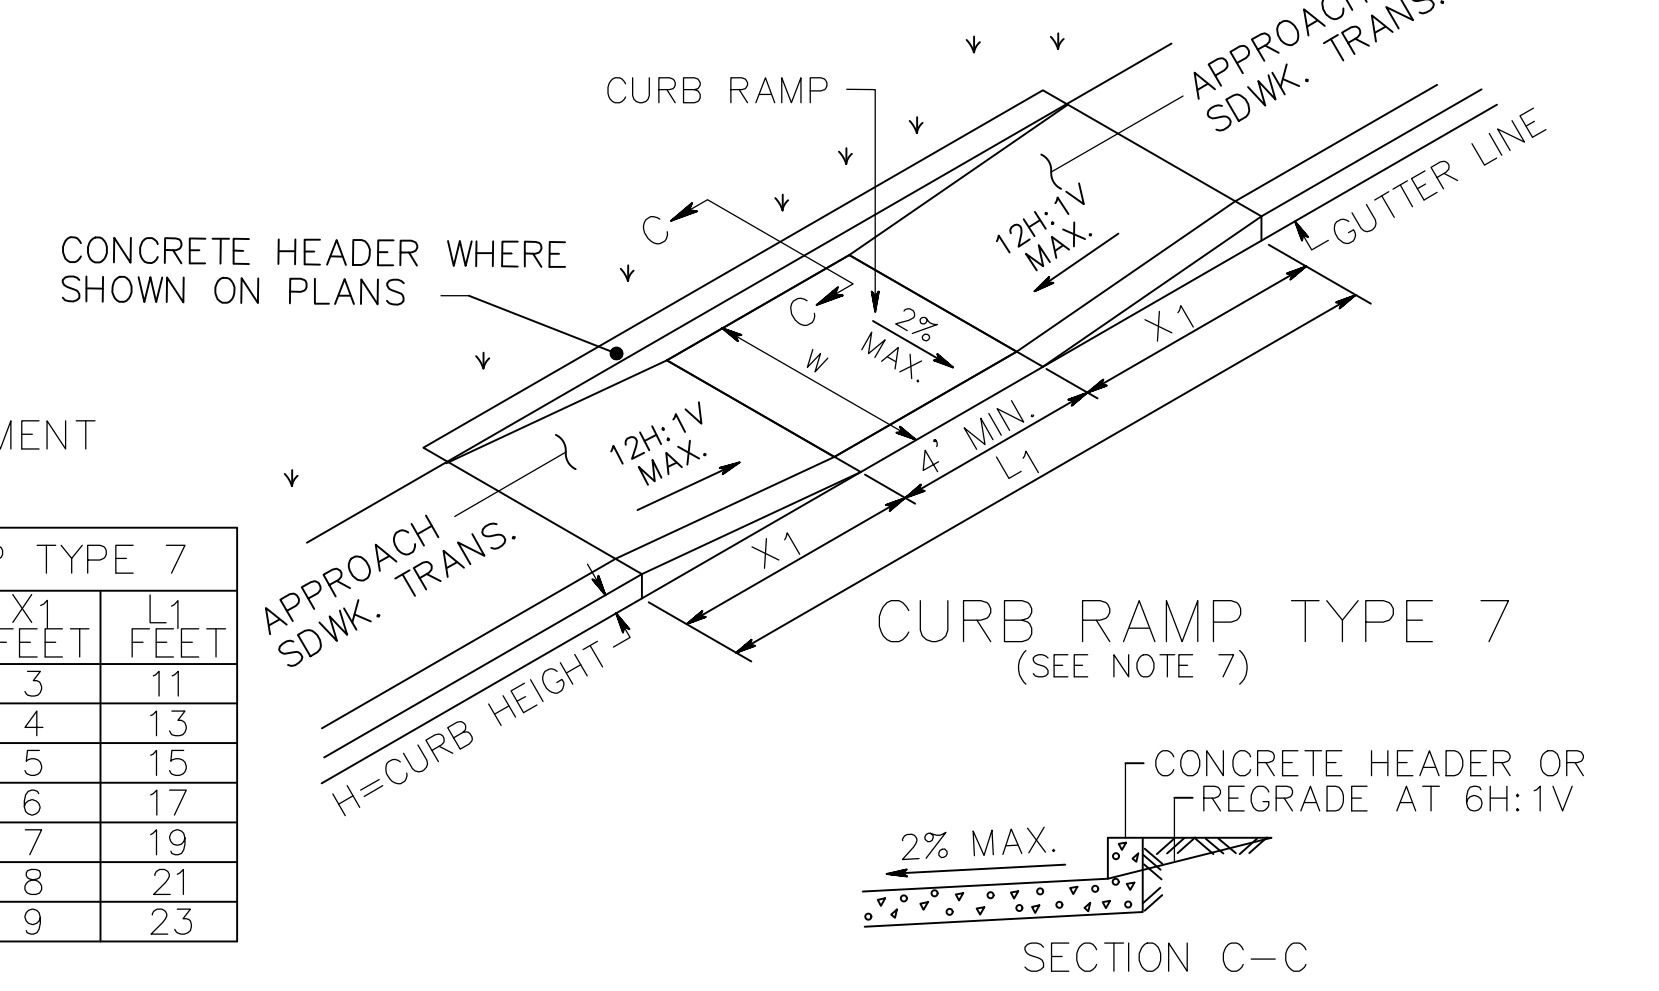

CURB RAMP TYPE 7 (SEE NOTE 7)


CURB RAMP TYPE 7			
W FEET	H INCHES	X1 FEET	L1 FEET
4 MIN.	3	3	11
6 MAX.	4	4	13
	5	5	15
	6	6	17
	7	7	19
	8	8	21
	9	9	23

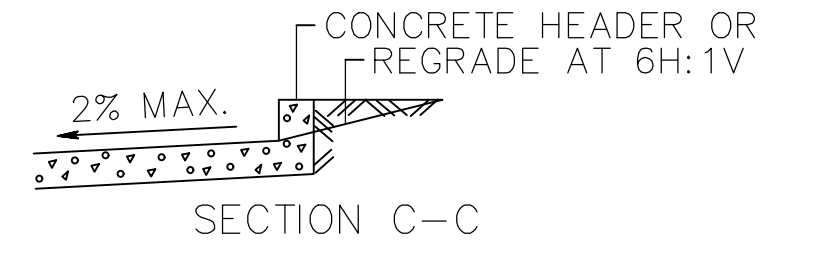

SECTION C-C

GENERAL NOTES:


- LANDING AREA, APPROACH SIDEWALK TRANSITIONS, AND CURB RAMP SHALL BE KEPT CLEAR OF OBSTRUCTIONS.
- DIMENSIONS SHOWN IN TABLES ARE FOR RELATIVELY FLAT SIDEWALK AREAS. CARE SHOULD BE TAKEN WHEN DETERMINING CURB RAMP SIZE BASED ON CURB HEIGHT (H) WHERE ELEVATION OF CURB AND SIDEWALK VARY DRASTICALLY IN AREA OF PROPOSED CURB RAMP.
- CURB (DROPPED CURB) GUTTERLINE TO BE FLUSH WITH ROADWAY PAVEMENT A MINIMUM OF 4 FEET AT ALL CURB RAMPS.
- FOR CURB RAMP TYPES 5 AND 6, IF A GRASS BUFFER DOES NOT EXIST, SLOPE CURB TO EQUAL SLOPE OF ADJACENT CURB RAMP.
- SIDEWALK AND CURB RAMP WITHIN AREA ENCLOSED BY HEAVY LINES TO BE PAID FOR AS CONCRETE SIDEWALK OF THE APPROPRIATE ADJACENT THICKNESS.
- CURB AND HEADER WITHIN AREA ENCLOSED BY HEAVY LINES TO BE PAID FOR AS VERTICAL CURB OR SLOPING CURB OF THE APPROPRIATE ADJACENT SIZE AND KIND.
- WHERE THE DISTANCE FROM THE GUTTER LINE TO THE OUTSIDE EDGE OF SIDEWALK IS 6 FEET OR LESS, CURB RAMP TYPE 7 SHOULD BE USED, INSTEAD OF CURB RAMP TYPE 1 THROUGH 4.
- CROSSWALKS AND STOP LINES MAY BE MARKED OR UNMARKED, SEE PLANS.
- PREFERRED AND ALTERNATE TREATMENTS SHOULD NOT BE INTERMIXED WITHIN THE SAME INTERSECTION.
- DIMENSIONS SHOWN IN TABLES ARE FOR 3 INCH TO 9 INCH CURB HEIGHTS. WHERE THE CURB HEIGHTS ARE OTHER THAN WHAT IS PROVIDED IN THE TABLES, THE DIMENSIONS OF THE RAMPS WILL HAVE TO BE CALCULATED BASED ON CROSS SLOPES SHOWN.

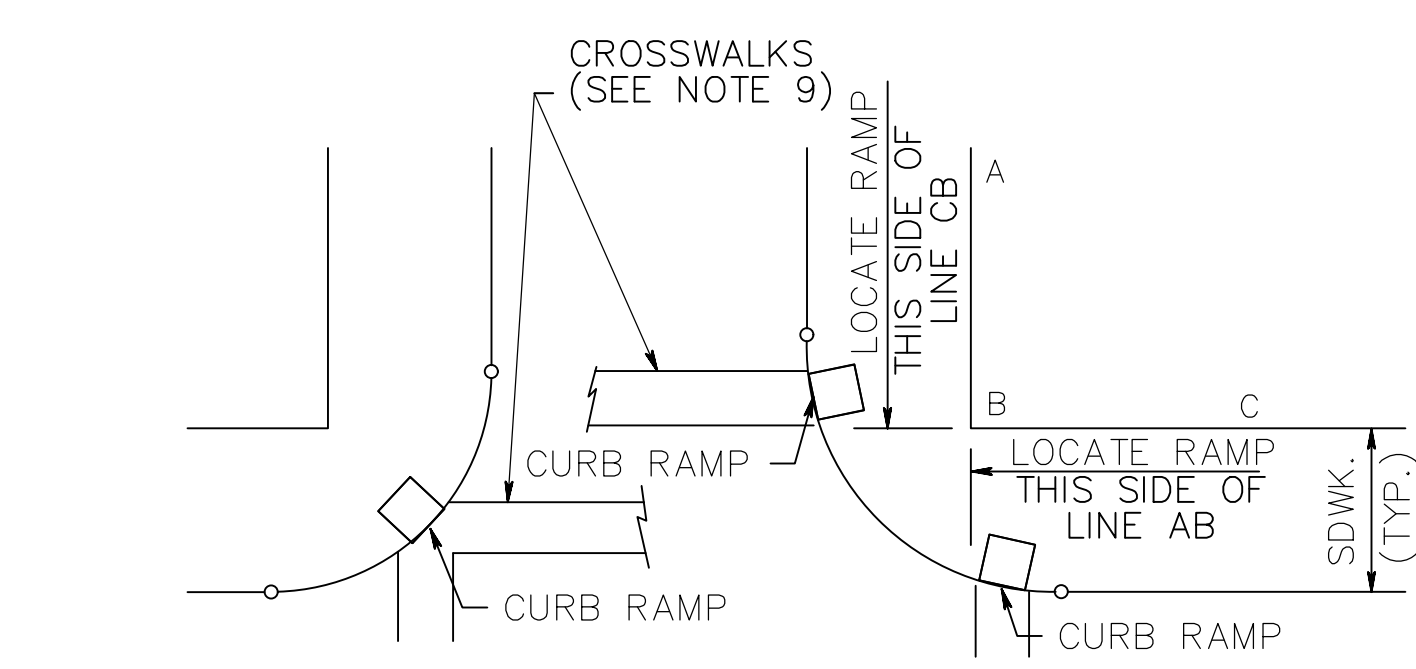

LOCATION OF CURB RAMP TYPES 1, 2, 3, 4 & 7 FOR CROSSING PARALLEL AND PERPENDICULAR TO HIGHWAY

CURB RAMP TYPE 1				
H INCHES	X1 FEET	L1 FEET	W FEET	
3	2.5	9.0	3	
4	3.3	10.6	4	
5	4.2	12.4	5	
6	5.0	14.0	6	
7	5.8	15.6	7	
8	6.7	17.4	8	
9	7.5	19.0	9	


CURB RAMP TYPE 2, 5, OR 6		
H INCHES	W FEET	
3	3	
4	4	
5	5	
6	6	
7	7	
8	8	
9	9	

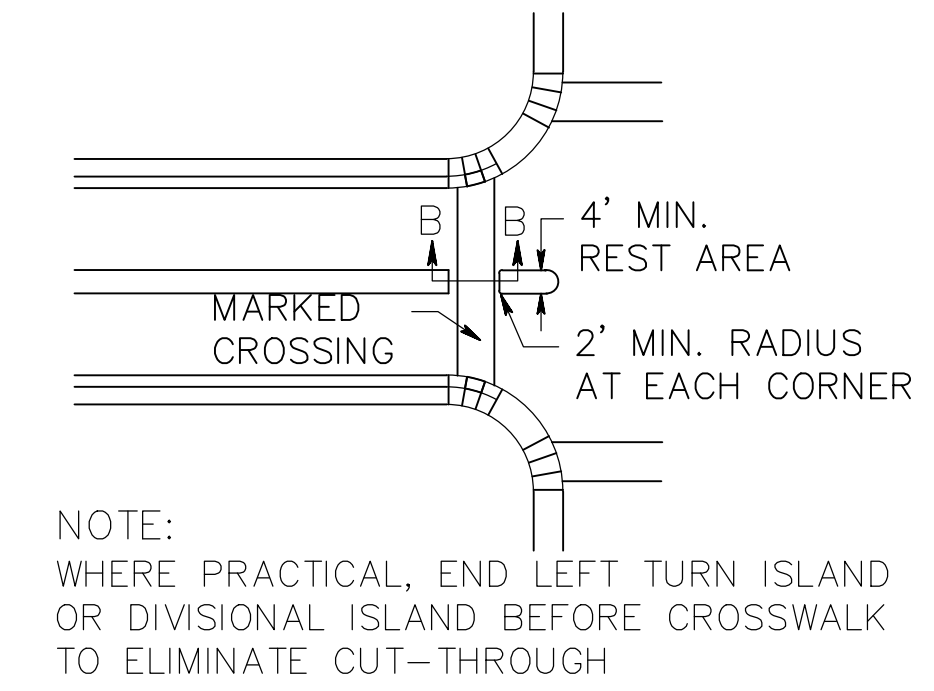


ISLAND WALKWAY OPENING AT INTERSECTIONS

CURB RAMP TYPE 3						
W FEET	H INCHES	X1 FEET	L1 FEET	Y INCHES	X2 FEET	L2 FEET
2.5	3	2.5	9	2.5	0.5	5
	4	3.3	10.6	2.5	1.5	7
	5	4.2	12.4	2.5	2.5	9
	6	5.0	14.0	2.5	3.5	11
	7	5.8	15.6	2.5	4.5	13
	8	6.7	17.4	2.5	5.5	15
	9	7.5	19.0	2.5	6.5	17
3.0	3	*	*	*	*	*
	4	3.3	10.6	3.0	1	6
	5	4.2	12.4	3.0	2	8
	6	5.0	14.0	3.0	3	10
	7	5.8	15.6	3.0	4	12
	8	6.7	17.4	3.0	5	14
	9	7.5	19.0	3.0	6	16
3.5	3	*	*	*	*	*
	4	3.3	10.6	3.5	0.5	5
	5	4.2	12.4	3.5	1.5	7
	6	5.0	14.0	3.5	2.5	9
	7	5.8	15.6	3.5	3.5	11
	8	6.7	17.4	3.5	4.5	13
	9	7.5	19.0	3.5	5.5	15
4.0	3	*	*	*	*	*
	4	*	*	*	*	*
	5	4.2	12.4	4.0	1	6
	6	5.0	14.0	4.0	2	8
	7	5.8	15.6	4.0	3	10
	8	6.7	17.4	4.0	4	12
	9	7.5	19.0	4.0	5	14


CURB RAMP TYPE 4					
W FEET	H INCHES	Y INCHES	X2 FEET	L2 FEET	
2.5	3	2.5	0.5	5	
	4	2.5	1.5	7	
	5	2.5	2.5	9	
	6	2.5	3.5	11	
	7	2.5	4.5	13	
	8	2.5	5.5	15	
	9	2.5	6.5	17	
3.0	3	**	**	**	**
	4	3.0	1	6	
	5	3.0	2	8	
	6	3.0	3	10	
	7	3.0	4	12	
	8	3.0	5	14	
	9	3.0	6	16	
3.5	3	**	**	**	**
	4	3.5	0.5	5	
	5	3.5	1.5	7	
	6	3.5	2.5	9	
	7	3.5	3.5	11	
	8	3.5	4.5	13	
	9	3.5	5.5	15	
4.0	3	**	**	**	**
	4	**	**	**	**
	5	4.0	1	6	
	6	4.0	2	8	
	7	4.0	3	10	
	8	4.0	4	12	
	9	4.0	5	14	

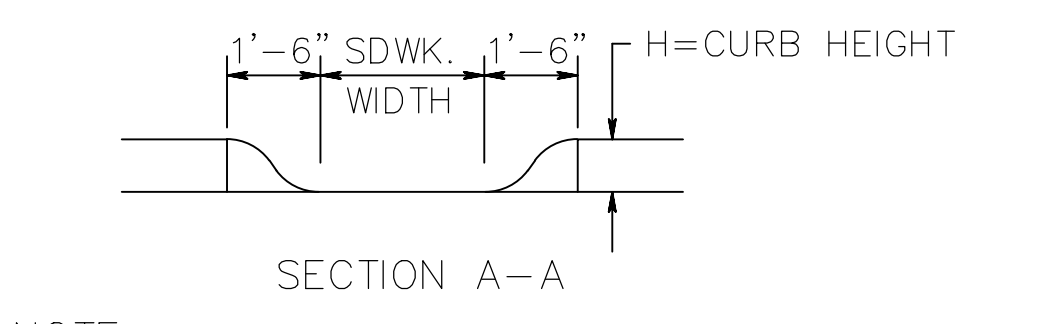

SECTION A-A

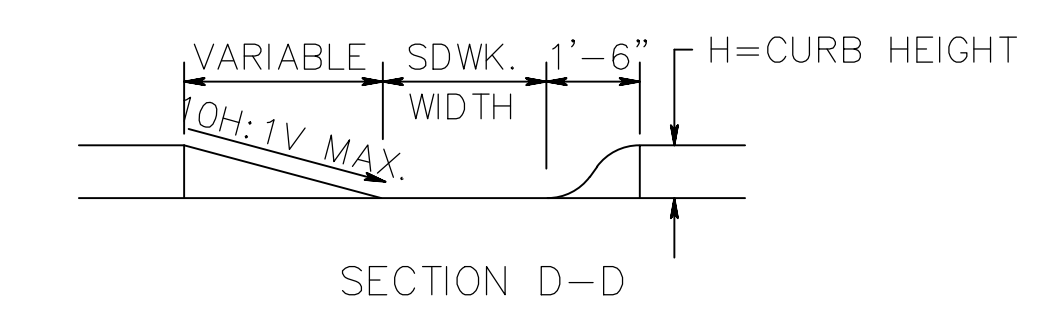


SECTION D-D

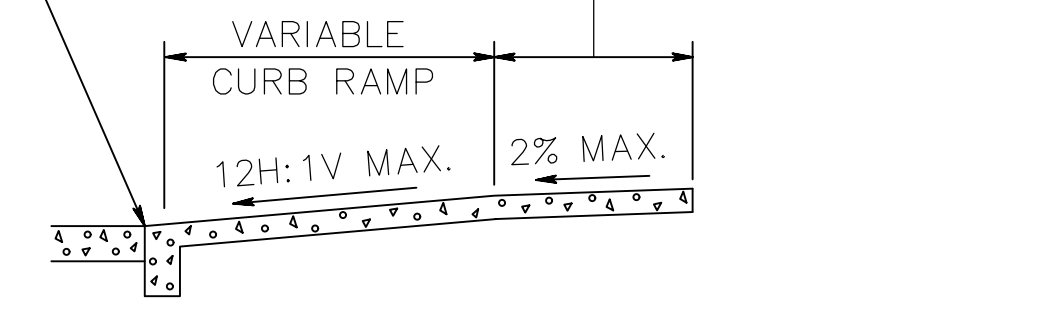


SECTION THROUGH CURB RAMPS 1 THROUGH 6

* TYPE 3 RAMP IS NOT APPLICABLE, USE TYPE 1. ** TYPE 4 RAMP IS NOT APPLICABLE, USE TYPE 2.

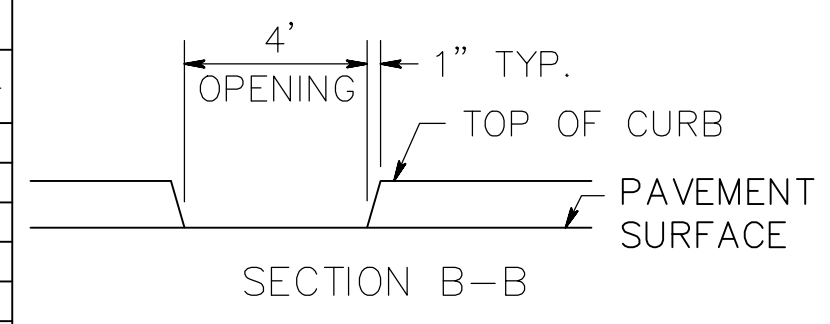

SECTION B-B

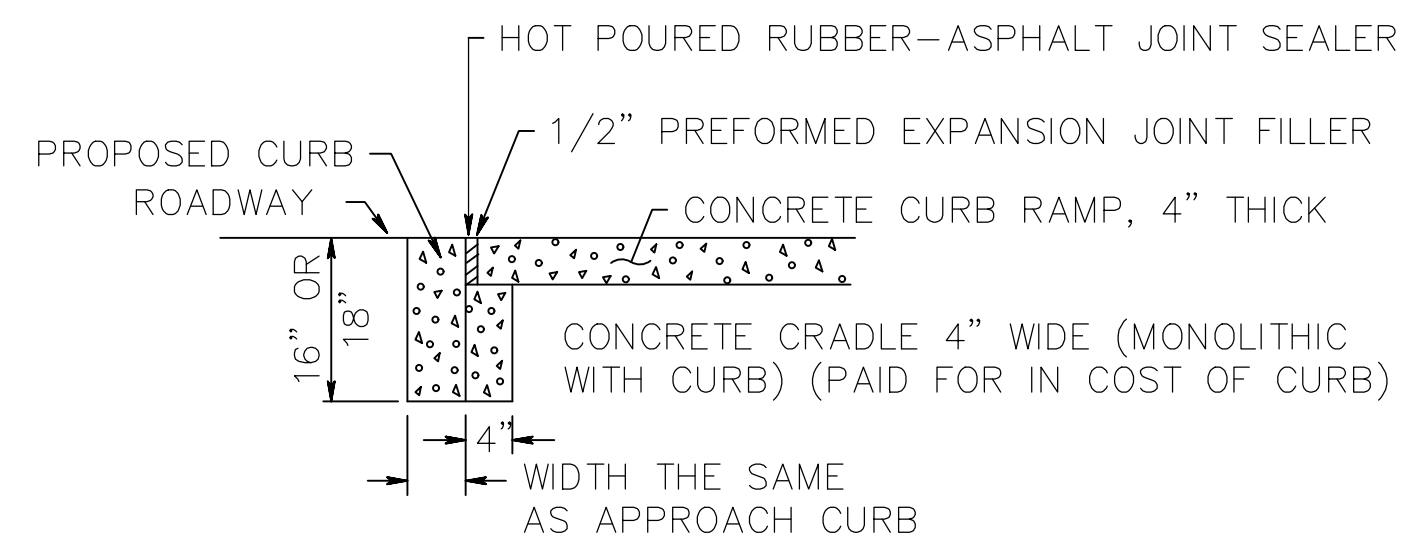


DROPPED CURB AND CRADLE


CONSTRUCTION DETAILS

IMPROVEMENTS TO HARRISON AVENUE

<p>BOROUGH OF FAIR HAVEN 748 River Road, Fair Haven, NJ 07704 phone: 732.747.0241 fax: 732.747.6962 website: www.fairhavennj.org</p>	Scale: NONE	Project No. 21-01
	Drawn by: RG	Designed by: RG
<p>RICHARD GARDELLA, PE, PP, CME, CPWM PROFESSIONAL ENGINEER New Jersey License No. 43747</p>	DATE: 02/28/2021	
Sheet Number: 6	of 7	

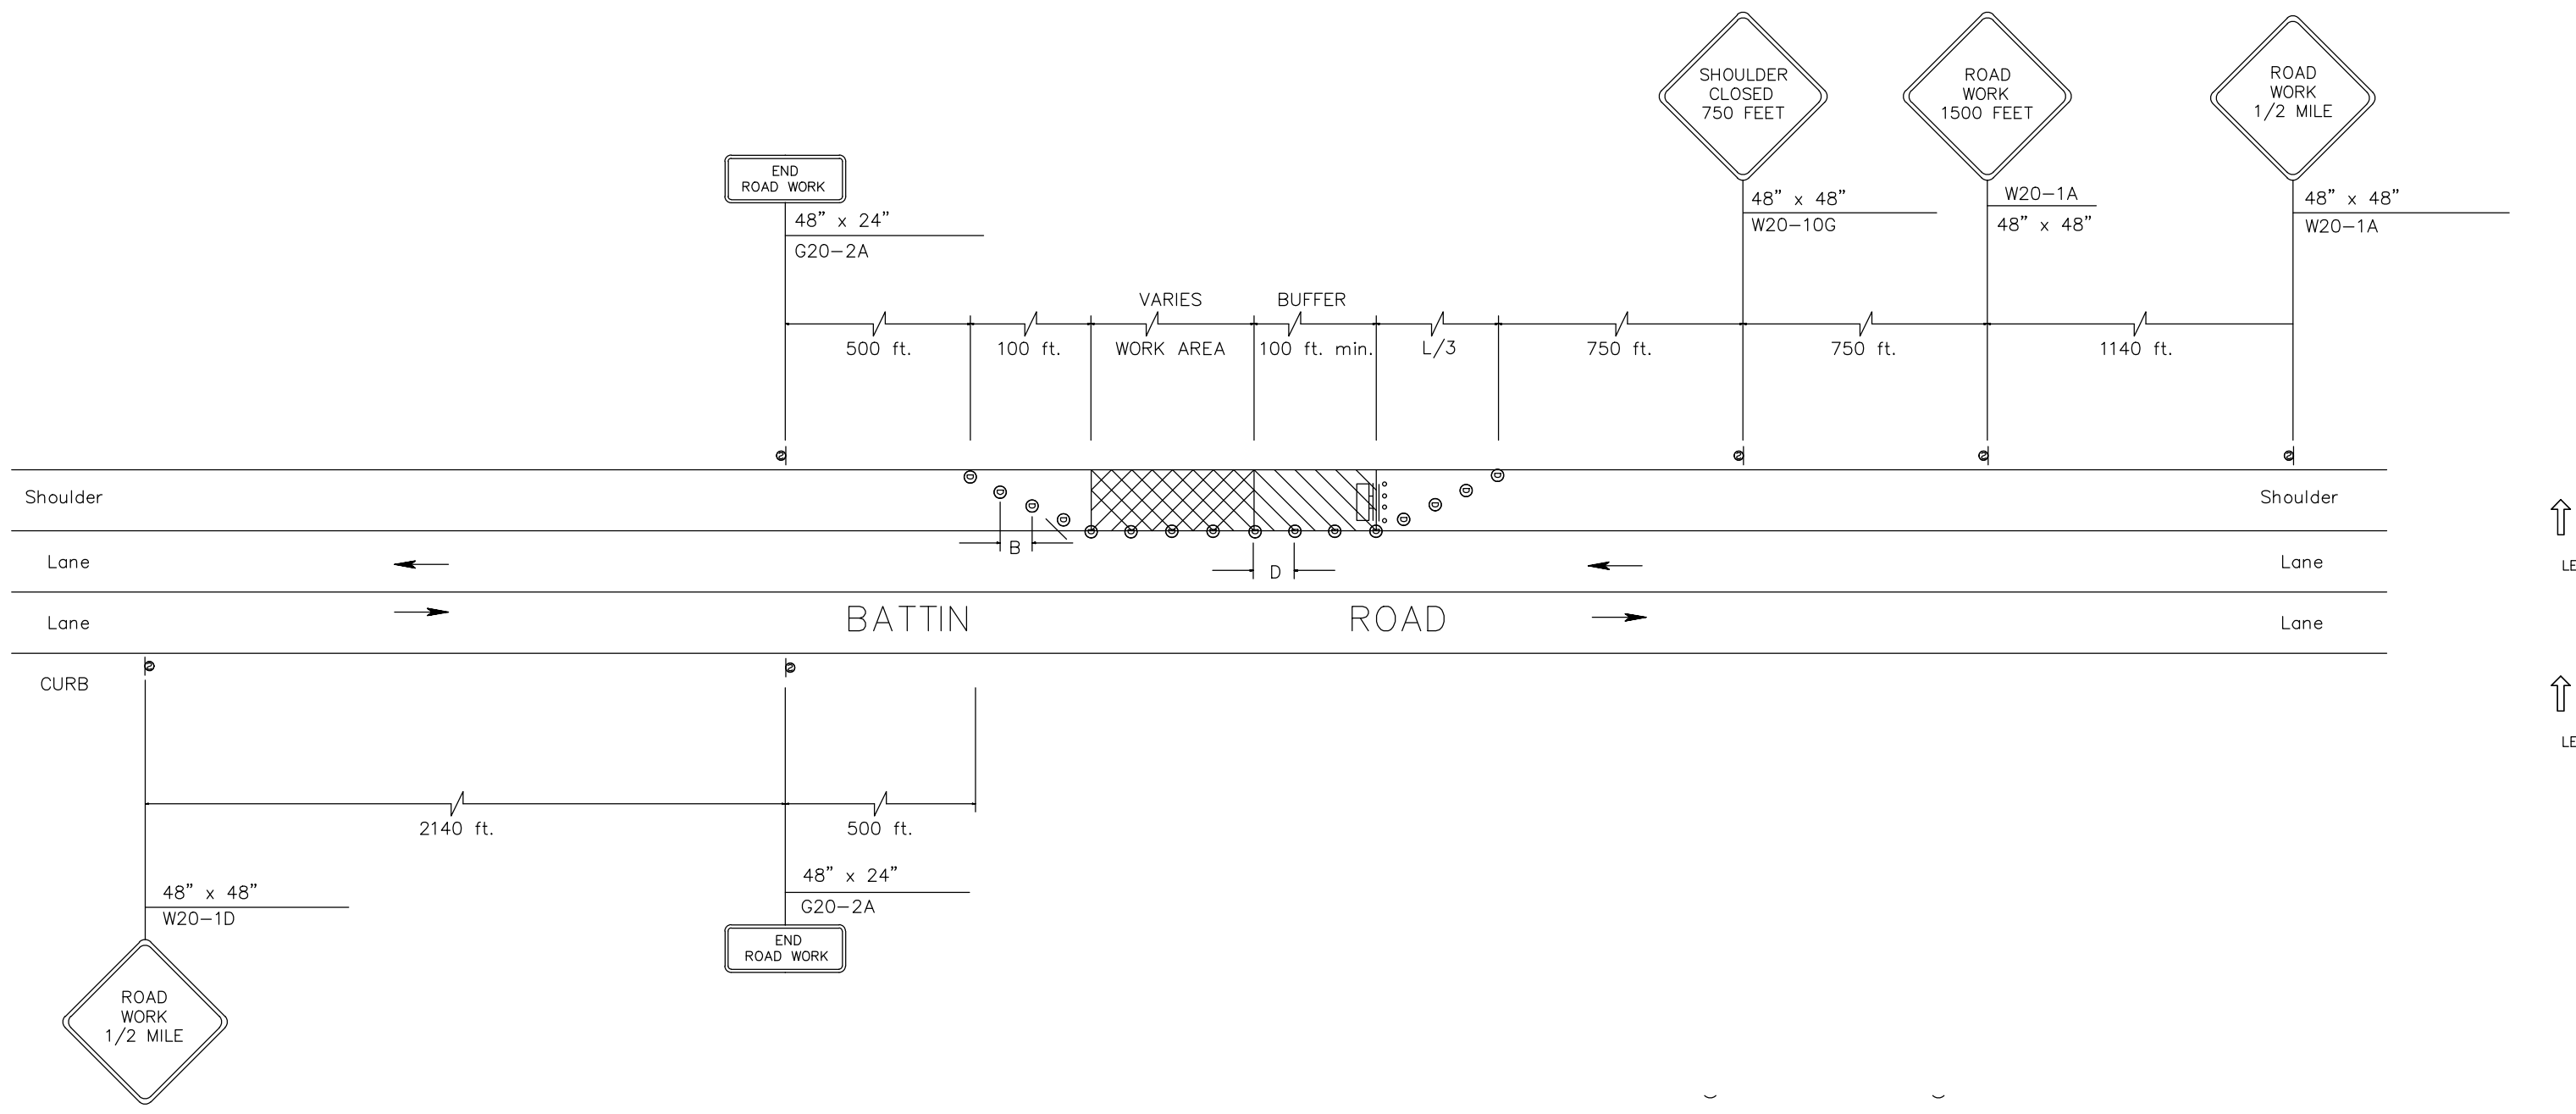

2 LANES, SHOULDER CLOSING - HARRISON AVENUE
NOT TO SCALE

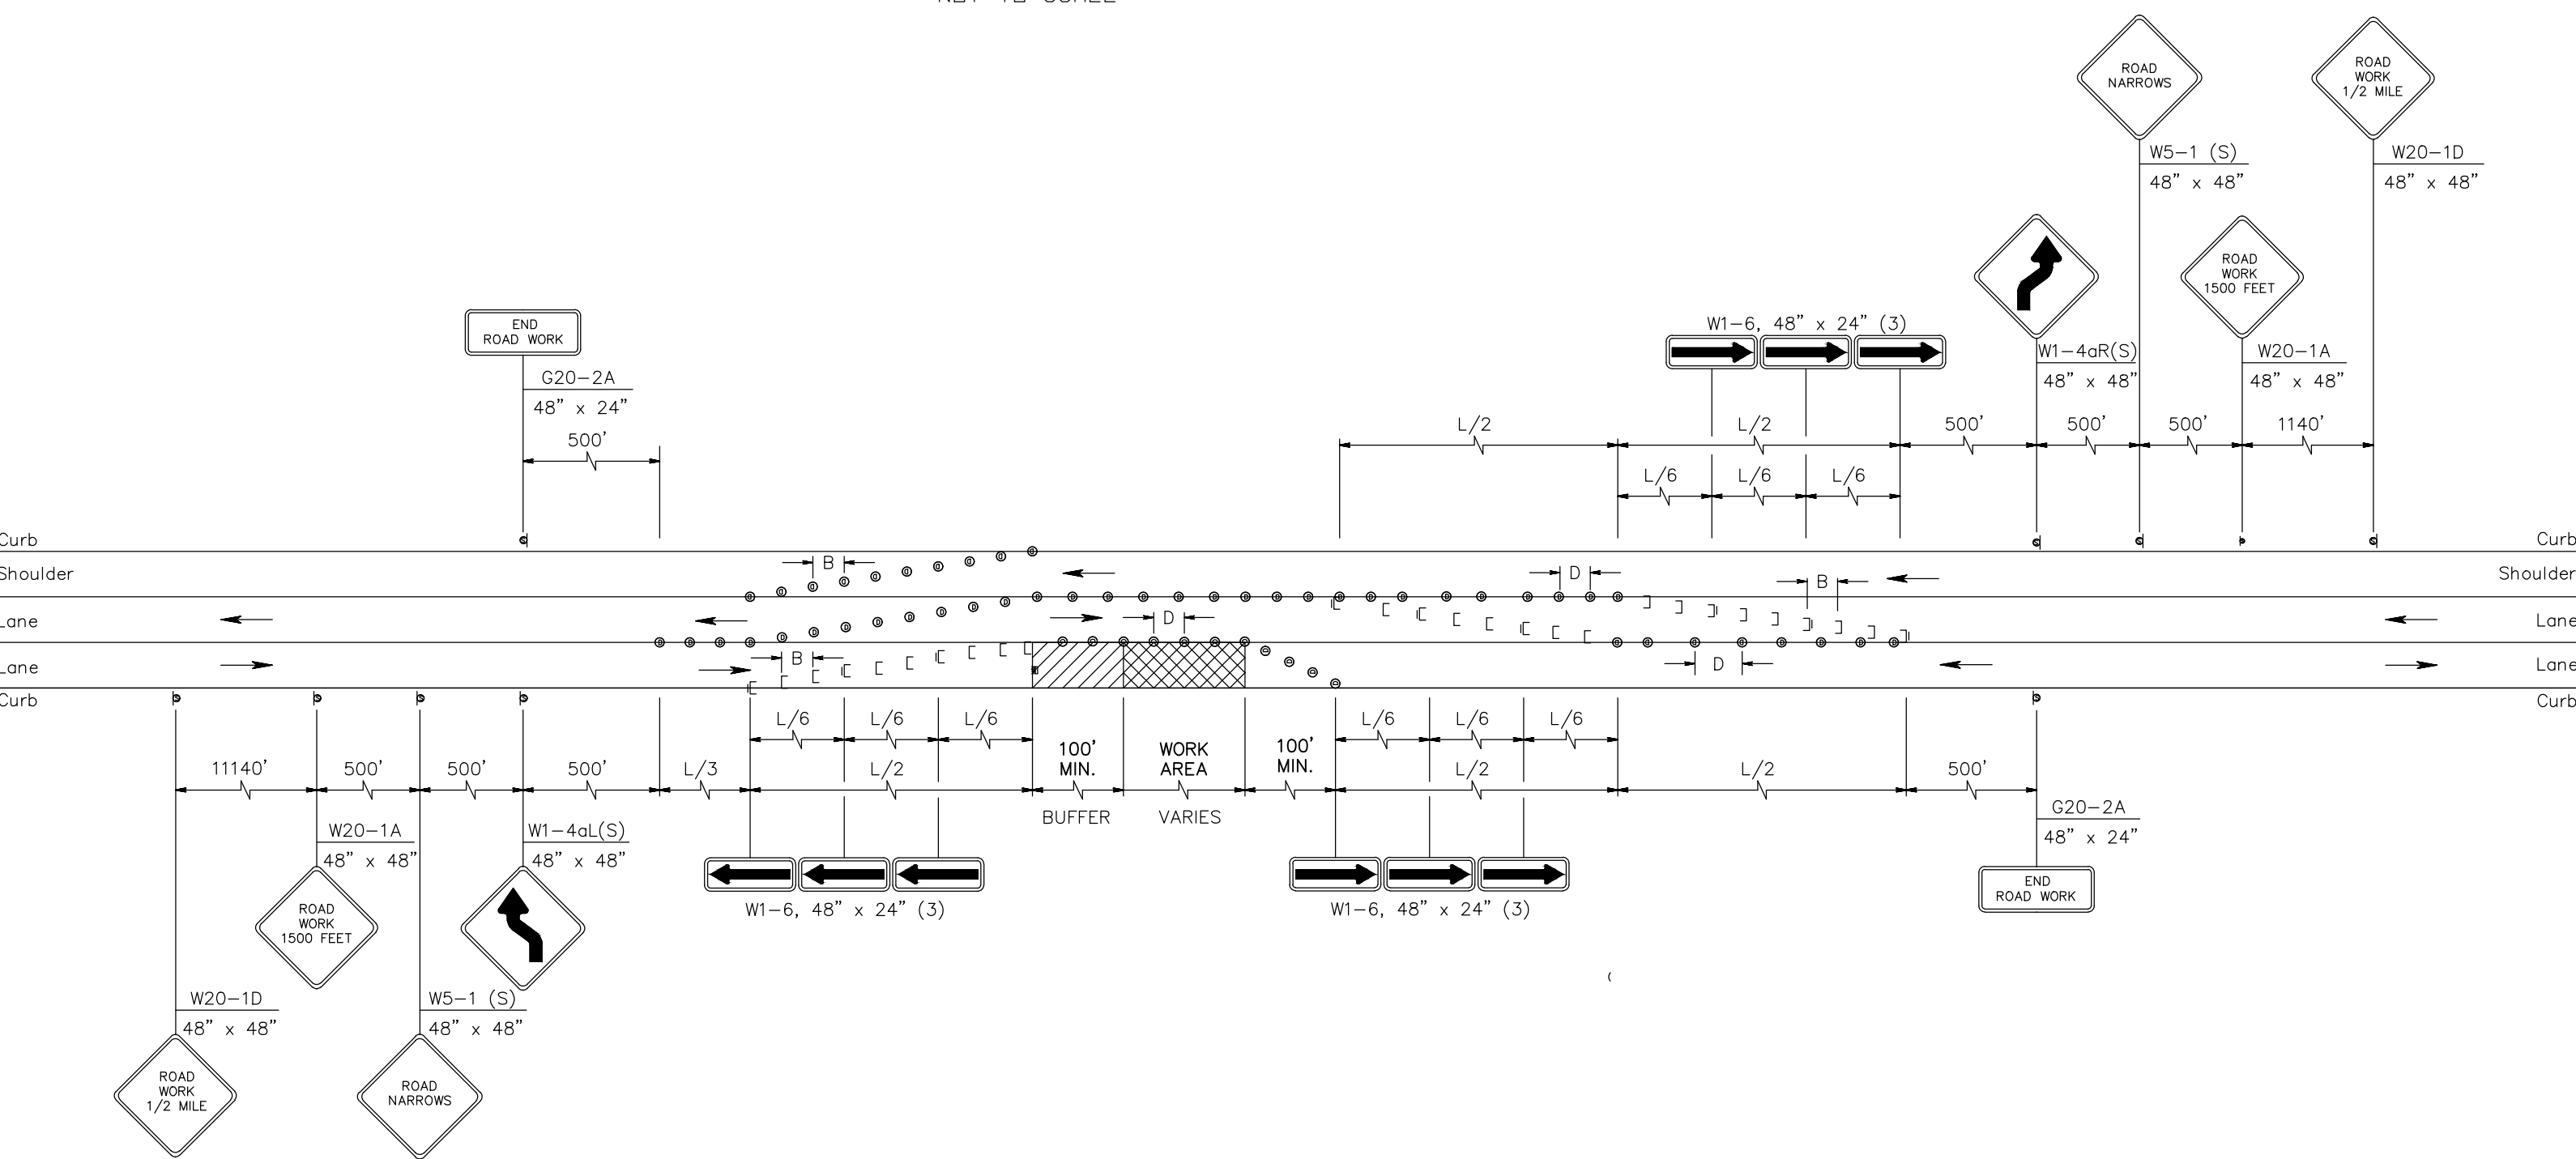

2 LANES, LANE & SHOULDER CLOSING - HARRISON AVENUE
NOT TO SCALE

LEGEND


- BREAKAWAY BARRICADE
- BREAKAWAY BARRICADES WITH SIGN
- CONSTRUCTION SIGNS
- DRUM
- TRAFFIC CONE
- PRECAST CONCRETE CURB CONSTRUCTION BARRIER (TYPE SPECIFIED)
- ← DIRECTION OF TRAFFIC FLOW
- TRAFFIC DIRECTOR, FLAGGER
- TRAILER MOUNTED MOUNTED ARROW BOARD SHOWING CAUTION MODE
- ↑ ILLUMINATED FLASHING ARROW MOUNTED ON TOWING VEHICLE SHOWING ARROW PATTERN (Left, Right, Both)
- ↑ TRAFFIC CONTROL TRUCK WITH MOUNTED CRASH CUSHION
- ↑ TRAFFIC CONTROL TRUCK WITH MOUNTED CRASH CUSHION AND ARROW BOARD SHOWING ARROW PATTERN (Left, Right, Both)
- TEMPORARY CRASH CUSHION, INERTIAL BARRIER SYSTEM
- TEMPORARY CRASH CUSHION, (all other approved)
- BUFFER ZONE
- WORK AREA
- PAINT STRIPING TRUCK OR OTHER OPERATING VEHICLE

GENERAL NOTES:


1. ADVANCE WARNING SIGNS DISTANCES, AND TAPER LENGTHS MAY BE MODIFIED, AT DIRECTION OF THE DEPARTMENT, TO ADJUST FOR REDUCED VISIBILITY DUE TO HORIZONTAL AND VERTICAL CURVATURE OF THE ROADWAY.
2. THE APPROXIMATE LOCATIONS OF THE ILLUMINATED FLASHING ARROW BOARDS ARE SHOWN ON THE TRAFFIC CONTROL PLANS. THESE LOCATIONS MAY BE MODIFIED AS APPROVED BY THE RE. TO ADJUST FOR VISIBILITY DUE TO HORIZONTAL OR VERTICAL CURVATURE OF THE ROADWAY OR TO POSITION AT A SAFER LOCATION. ILLUMINATED FLASHING ARROW BOARDS ARE TO BE USED FOR TEMPORARY LANE CLOSURES AND AT LOCATIONS SHOWN ON THE TRAFFIC CONTROL PLANS.
3. PRIOR TO ANY ROAD CONSTRUCTION, TRAFFIC CONTROL SIGNS AND DEVICES SHALL BE IN PLACE.
4. RAMPS AND/OR SIDE STREETS ENTERING THE ROADWAY AFTER THE FIRST ADVANCE WARNING SIGN SHALL BE PROVIDED WITH AT LEAST ONE W20-1F SIGN (ROAD WORK AHEAD) AS A MINIMUM.
5. ALL EXISTING ROAD SIGNS, PAVEMENT MARKINGS AND/OR FLOWABLE PAVEMENT REFLECTORS WHICH CONFLICT WITH THE PROPOSED TRAFFIC CONTROL PLAN SHALL BE COVERED, REMOVED OR RELOCATED AS DIRECTED BY THE RE.
6. CONFLICTING OR NON-OPERATING SIGNAL INDICATIONS ON EITHER THE EXISTING, TEMPORARY, OR PROPOSED TRAFFIC SIGNAL SYSTEMS SHALL BE BAGGED OR COVERED.
7. MAINTENANCE AND PROTECTION OF TRAFFIC SHALL BE IN ACCORDANCE WITH THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES - PART VI "STANDARDS AND GUIDES FOR TRAFFIC CONTROL FOR STREET AND HIGHWAY CONSTRUCTION, MAINTENANCE, UTILITY, AND INCIDENT MANAGEMENT OPERATIONS", UNLESS OTHERWISE NOTED IN THE PLANS AND SPECIFICATIONS.
8. CONSTRUCTION SIGN W99-2 (GIVE US A BRAKE) SHALL BE LOCATED 200 FEET IN ADVANCE OF PROJECT LIMITS.
9. A W1-6 (ARROW) SIGN MOUNTED ON A BREAKAWAY BARRICADE AND CENTERED ON THE CLOSED WIDTH SHALL BE LOCATED 100 FEET BEYOND EACH INTERSECTION OR MAIN ACCESS POINT WITHIN THE AREA OF A LANE OR SHOULDER CLOSURE.
10. CONSTRUCTION SIGNS R11-4 (ROAD CLOSED TO THRU TRAFFIC) SHALL BE PLACED AT THE INTERSECTING STREETS WHICH ARE CLOSED TO TRAFFIC BECAUSE OF CONSTRUCTION.
11. CONSTRUCTION SIGNS W8-8A (SYMBOL FOR UNEVEN PAVEMENT) AND W8-14A (GROOVED PAVEMENT) SHALL BE USED WHEN SUCH PAVEMENT CONDITIONS EXIST. THE PLACEMENT OF THESE SIGNS SHALL BE AS DIRECTED BY THE RE.
12. MOVING WORK AREAS IN A LANE CLOSURE REQUIRE A TRAILER MOUNTED ILLUMINATED FLASHING ARROW TO REMAIN AT THE END OF THE TAPER, THE TRAFFIC CONTROL TRUCK WITH MOUNTED CRASH CUSHION THAT SHALL MOVE WITH THE WORK AREAS TO KEEP A 70 FEET MIN. AND 150 FEET MAX. BUFFER IN ADVANCE OF EACH WORK AREA.
13. THE CONTRACTOR SHALL SUBMIT A PLAN FOR THE SAFE ACCESS OF CONSTRUCTION VEHICLES THROUGHOUT THE WORK SITE WHERE SPACE CONSTRAINTS PREVENT THE USE OF LANE CLOSURES. THE PLAN SHALL BE SUBMITTED TO THE RE IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS.
14. ALL EXCAVATED AREAS WITHIN OR ADJACENT TO THE ROADWAY SHALL BE BACKFILLED AND PLACED ON AT LEAST 1:1V SLOPE BEFORE THE END OF EACH WORK DAY. OTHER EXCAVATED AREA WITHIN THE CLEAR ZONE SHALL BE BACKFILLED.
15. WHERE REQUIRED, THE CONTRACTOR SHALL MAKE PROVISIONS FOR MAINTAINING PEDESTRIAN CROSSING LOCATIONS AND TYPE AS DIRECTED BY THE RE.
16. BITUMINOUS CONCRETE PLACED DURING THE VARIOUS CONSTRUCTION STAGES SHALL BE TRANSITIONED ON A MINIMUM 20H:1V SLOPE TO MEET THE ADJACENT EXISTING GRADE AT THE LONGITUDINAL AND TRANSVERSE LIMITS OF THE STAGE CONSTRUCTION AREAS UNLESS OTHERWISE NOTED ON THE STAGE CONSTRUCTION PLANS.
17. THE PLACEMENT AND OR RELOCATION OF PRECAST CONCRETE CURB, CONSTRUCTION BARRIER SHALL BE DONE DURING APPROVED OFF-PEAK HOURS WHEN TRAFFIC MAY BE REDUCED TO ONE LANE IN EACH DIRECTION.
18. THE REDUCED SPEED AHEAD SIGN, W3-5(S) (BLACK ON ORANGE) SHALL BE LOCATED IN ADVANCE OF SPEED LIMIT R2-1 SIGNS WHICH REDUCE THE NORMAL POSTED SPEED LIMIT THROUGH THE CONSTRUCTION ZONE.
19. TRAFFIC FINES DOUBLED IN WORK AREA R(N)5-17(S), 4 FEET BY 2.5 FEET SIGN SHALL BE LOCATED 500 FEET AFTER THE FIRST ADVANCE WARNING SIGN, (W20 SERIES) AT EACH WORK AREA LOCATED WITHIN URBAN AREAS. THIS SIGN SHALL ALSO BE USED ON PROJECTS REQUIRING MOVING OPERATIONS IN WHICH CASE THE SIGN SHALL BE MOUNTED ON A SLOW MOVING CONSTRUCTION VEHICLE.
20. THE FINAL HMA SURFACE PAVEMENT SHALL NOT BE CONSTRUCTED UNTIL THE FINAL STAGE OF THE PROJECT UNLESS OTHERWISE DIRECTED BY THE RE OR INDICATED ON THE PLANS, MANHOLES AND INLETS SHALL BE SET TO FINISHED GRADE AND TEMPORARY PAVEMENT RAMPS ARE TO BE CONSTRUCTED AROUND THEM WITH A MINIMUM 20H:1V SLOPE IN ALL DIRECTIONS USING HOT MIX ASPHALT PAVEMENT. THIS TEMPORARY MATERIAL WILL BE REMOVED IMMEDIATELY PRIOR TO PLACING THE SURFACE COURSE.

DRUMS SHALL BE MADE OF ORANGE PLASTIC WITH A MINIMUM OF FOUR ALTERNATE FLUORESCENT ORANGE AND WHITE RETROREFLECTIVE STRIPES. IF THERE ARE NON-REFLECTORIZED SPACES BETWEEN THE STRIPES, THEY SHALL BE NO MORE THAN 2" WIDE. RETROREFLECTIVE SHEETING FOR STRIPES SHALL CONFORM WITH ASTM D 4956 TYPE VII OR VIII WITH S2 REQUIREMENTS.

THE TOP OF THE DRUM SHALL NOT BE OPEN. DRUMS SHALL BE CONSTRUCTED TO INHIBIT ROLLING IF KNOCKED OVER.

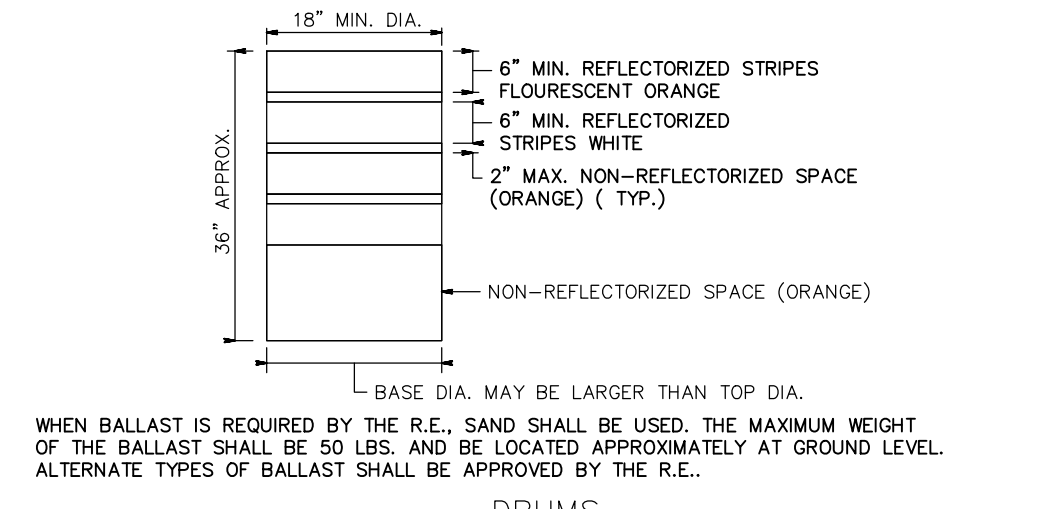

DRUMS

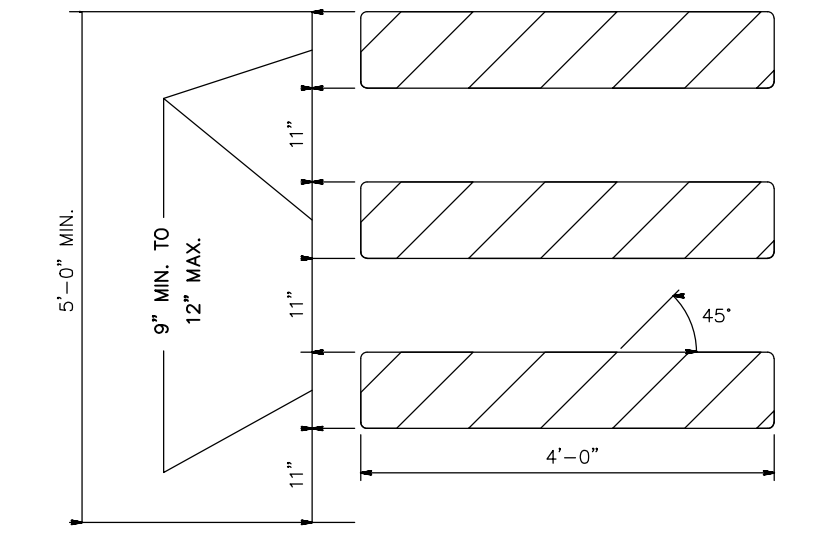

TYPE III BARRICADE - FRONT VIEW

- NOTES:
1. THE 9" MIN. x 48", OR 12" MAX. x 48" BARRICADE RAILS SHALL BE FABRICATED FROM 0.125" MAX. PLASTIC SHEETING AND SHALL BE ATTACHED, 4 PER RAIL, WITH 1 INCH NO. 14 PAN HEAD METAL SCREWS OR PLASTIC RIVETS. ALL CORNERS SHALL BE ROUNDED.
 2. ORANGE AND SILVER (WHITE) STRIPES SHALL BE RETROREFLECTIVE SHEETING, ASTM D 4956 TYPE III, AS SHOWN FOR CONSTRUCTION SIGNS. ALTERNATE ORANGE AND SILVER (WHITE) STRIPES 6" WIDE SLOPING DOWNWARD AT AN ANGLE OF 45 DEGREES IN THE DIRECTION TRAFFIC IS TO PASS.
 3. IF NECESSARY, THE SANDBAGS SHALL BE FABRICATED AND PLACED ACCORDING TO THE MANUFACTURER'S RECOMMENDATION.
 4. THE FRAMING FOR BARRICADE PANELS SHALL BE NCHRP-350 CRASHED TESTED AND FHWA APPROVED.

BREAKAWAY BARRICADES

REGULATORY APPROACH SPEED OF TRAFFIC MILES/HOUR	RECOMMENDED TAPER LENGTH AND SPACING FOR CHANNELIZING TAPERS			RECOMMENDED SPACING ALONG TANGENTS	
	MINIMUM TAPER RATIO IN LENGTH PER FOOT OF WIDTH	MINIMUM TAPER LENGTH L - FOR LANE TAPERS IN FEET	MAXIMUM DEVICE (B) SPACING ALONG TANGENTS IN FEET	MINIMUM DEVICE (D) SPACING ALONG TANGENTS IN FEET	MAXIMUM DEVICE (D) SPACING ALONG TANGENTS IN FEET
25	10:1	105	115	125	25
30	15:1	150	165	180	30
35	20:1	205	225	245	35
40	25:1	270	300	325	40
45	35:1	350	405	450	45
50	50:1	500	550	600	50
55	55:1	550	605	660	55
60	60:1	600	660	720	60
65	65:1	650	715	780	65

NOTE: THE MAXIMUM DEVICE SPACING ALONG CURVES SHALL BE AS DEFINED FOR TAPERS (B) IN THE ABOVE TABLE.




W20-1
48" X 48"
16 S.F.
SIGN "A"



48" X 24"
SIGN "B"

NOTES:
TRAFFIC CONES SHALL BE PREDOMINANTLY ORANGE IN COLOR.
BASES MAY BE OF BREAKAWAY BALLASTED TYPE.
MINOR MANUFACTURER'S VARIATIONS MAY BE ACCEPTABLE UPON APPROVAL OF THE ENGINEER.

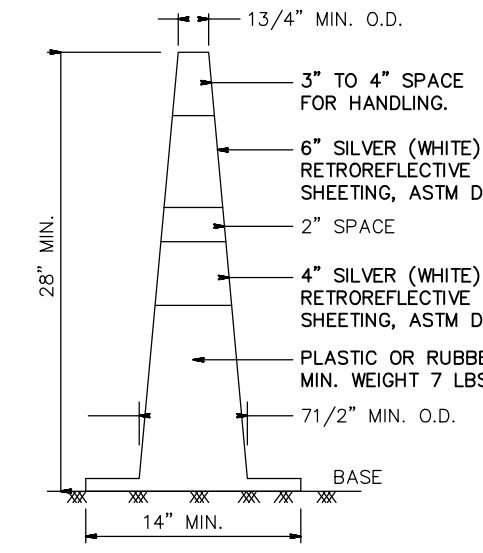

TRAFFIC CONES

TRAFFIC CONTROL PLAN AND NOTES

IMPROVEMENTS TO HARRISON AVENUE



BOROUGH OF FAIR HAVEN
748 River Road, Fair Haven, NJ 07704
phone: 732.747.0241 fax: 732.747.6962
website: www.fairhavennj.org

Scale: 1"=30'
Project No.: 21-01
Drawn by: RG
Designed by: RG

R. Gardella
RICHARD GARDELLA, PE, PP, CME, CPWM
PROFESSIONAL ENGINEER
New Jersey License No. 43747

DATE: 02/26/2021

Sheet Number: 7
of 7